plugin **389,862**








In order to connect to the ECU use the CABLE F32GN037C. Make sure that the POWER led (red) on Trasdata is ON.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION	
ROSSO RED	POSITIVO DIRETTO POWER BATTERY	
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON	
NERO BLACK	MASSA GND	
GIALLO YELLOW	KLINE	
VERDE GREEN	CAN LOW	
BIANCO WHITE	ICAN HIGH	
GRIGIO GREY	POL4 BOOT	F32GH037C
BLU	POL5 CNF1	Processed 1
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE	SHADEN -
MARRONE BROWN	RESET	

ECU CONNECTOR

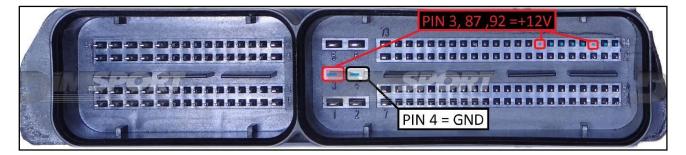


To the power feeding pins 3,87,92 (+12V) you can connect both wires red (VECU) and orange VKEY) of the F32GN037C cable, they both have 12V signal.

WARNING:

in order to work it is necessary to remove both ECU layers and perform the 6 bridges (LINK) on the lower side of the ECU. Then close it with all the screws, place it back into the vehicle and verify that the vehicle runs fine without any warning lights.

The 6 bridges (LINK) can be definitively left on the ECU without removing them.

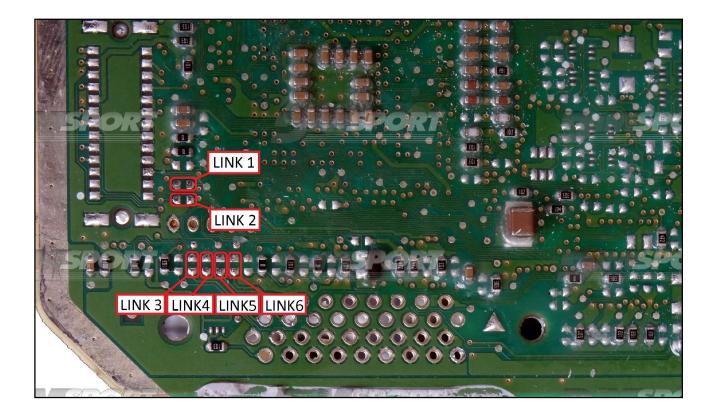


DIRECT CONNECTION – ECU READING:

For the READING procedure use the FLAT cable F34NTF53

Pin	Colore Colour	
11	Non usato	
	Not used Non usato	
12	Not used	
13	Non usato	
and the second sec	Not used Non usato	
14	Not used	
15	Non usato	
15	Not used Non usato	
16	Not used	
4 7	Non usato	
17	Not used	
18	Grigio	
	Grey Bianco	
19	White	
20	Nero	
20	Black	
21	Marrone	
	Brown	
22	Rosso	
a second s	Red Arancio	
23	Orange	
24	Giallo	
	Yellow Verde	
25	Green	
26	Non usato	
20	Not used	300 - 300-2

Connect the wires 18,19,20,21,22,23,24,25 avoiding any short circuit among the pads.

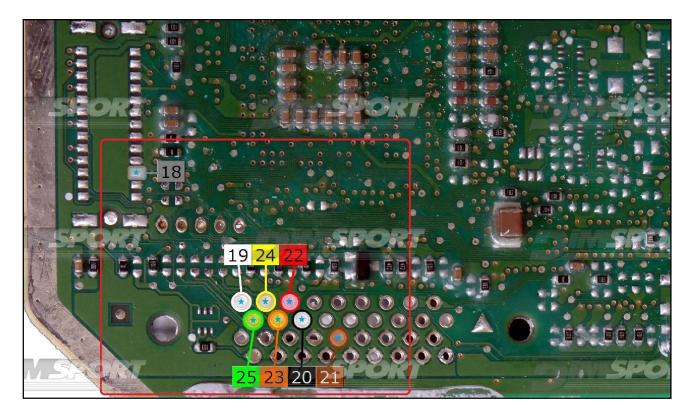

DIRECT CONNECTION – ECU WRITING:

For the WRITING procedure use the FLAT cable F34NTF51 $\,$

13 9 24 10		
Pin	Colore Colour	
1	Non usato	
	Not used Non usato	
2.	Not used	
	Non usato	
3	Not used	
4	Non usato	
	Not used	
5	Verde	
	Green	
6	Blu	
	Blue Viola	
7	Violet	
	Grigio	
8	Grey	and the second sec
0	Non usato	Contraction of the local division of the
9	Not used	
10	Non usato	
10	Not used	

Connect the wires 5,6,7,8 avoiding any short circuit among the pads.

