plugin 666 BOSCH EDC17C41 IROM TC1797 GPT BMW

#### **GPT CONNECTION MODE**

To perform the GPT connection it is necessary to use both the ANALOG PORT and the DIGITAL PORT.

## **GPT** connection with loose wires

Connect the F32GN037 cable to the ANALOG PORT


Connect the F34NTA15 to the **DIGITAL PORT**, use the YELLOW and ORANGE wires ONLY for the GPT signals as displayed in the following pictures.

## **GPT connection with DIMA**

Connect the F32GN038 cable to the ANALOG PORT

Connect the F34NTA15 to the **DIGITAL PORT**, use the YELLOW and ORANGE wires ONLY for the GPT signals as displayed in the following pictures.

#### **F34NTA15**

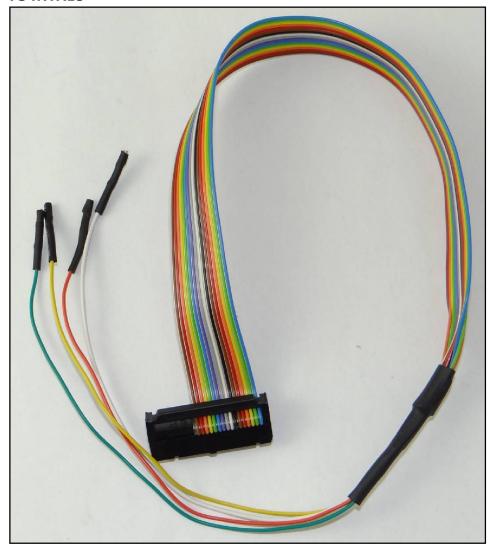

# EDC17C41 BMW (DDE721)

**WARNING**: to get access to the BOOT pin and to the programming pads for the DIMA connection it is necessary to remove the motherboard on both sides, unglue both metal covers with care. After opening and before reading YOU MUST connect the ecu on the car to check if that car starts.

**IMPORTANT**: before setting the ECU back into the vehicle close the ECU with the covers and tighten up very well the screws because they fix the motherboard to the metal covers. DO NOT START the engine without performing such operation before.






# **ECU CONNECTOR**

For the connection use the cable F32GN037C connected to the ECU.

Make sure that the POWER led (red) on Trasdata is ON.


Do not use this connection with the metal positioning frame kit, it will be the F34DM011 to power the ECU.

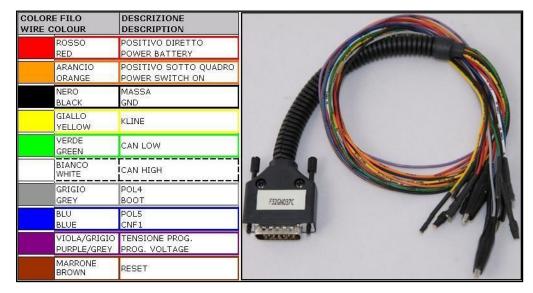

#### **GPT DIRECT CONNECTION**

GPT connection is required for the first time only, after the first ECU reading it is not necessary any longer. Connect the F34NTA15 flat cable to the GPT S1 & GPT S2 pins.


PIN / Colore PIN / Coulor	DESCRIZIONE DESCRIPTION
	GPT_S2
	GPT_S1

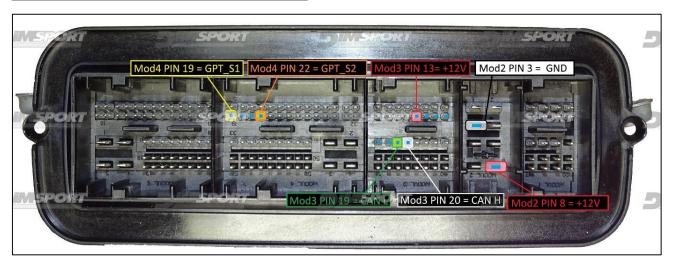

# **BOOT CONNECTION**

Connect the GREY wire of the cable F32GN037C as shown in the picture.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION	
GRIGIO GREY	POL4 BOOT	

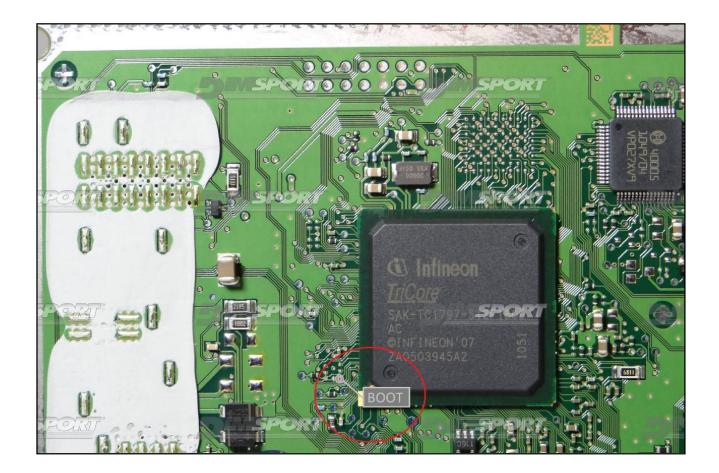

## **METAL POSITIONING FRAME & BNP POSITIONING FRAME CONNECTION**

For the DIMA connection is required the F34DM011 adapter + the F32GN038 flat cable. Connect the F32GN038 FLAT cable to the ANALOG PORT and to the F34DM011 adapter. Connect the F34NTA15 flat cable to the DIGITAL PORT and to the ECU as described at pg.4 . Perform the connections as shown in the previous detail at pg.5 using for the BOOT signal the specific clamp on the F34DM011 adapter (verify that the yellow BOOT switch present on the F34DM011 is set in position ON).

