
plugin 710 BOSCH EDC17C66 IROM TC1793 GPT MERCEDES

#### **CONNESSIONI con MODALITA' GPT**

To perform the GPT connection it is necessary to use both the ANALOG PORT and the DIGITAL PORT.

#### **GPT** connection with loose wires

Connect the F32GN037 cable to the **ANALOG PORT**Connect the F34NTA15 to the **DIGITAL PORT**, use the YELLOW and ORANGE wires ONLY for the GPT signals as displayed in the following pictures.

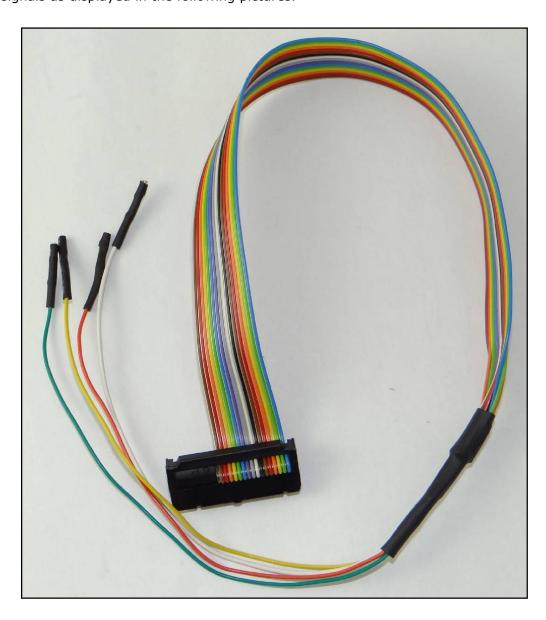

### EDC17C66





#### **ECU CONNECTOR**

For the connection use the cable F32GN037C connected to the ECU. Make sure that the POWER led (red) on Trasdata is ON.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION	
ROSSO RED	POSITIVO DIRETTO POWER BATTERY	
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON	
NERO BLACK	MASSA GND	
GIALLO YELLOW	KLINE	
VERDE GREEN	CAN LOW	
BIANCO WHITE	ICAN HIGH	
GRIGIO GREY	POL4 BOOT	F32CW037C
BLU BLUE	POL5 CNF1	Townson of the same of the sam
	TENSIONE PROG. PROG. VOLTAGE	- CHANGE
MARRONE BROWN	RESET	

**WARNING:** due to the relevant power absorbed by the ECU, instead of the standard power supply, it is necessary to use a booster or an additional battery. The ECU must be fed through the Trasdata, connect the F32GN003 power cable to the Trasdata and the crocodile side to the power source.






## **DIRECT BOOT CONNECTION**

Connect the GREY wire of the cable F32GN037C as shown in the picture.


COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION	
GRIGIO GREY	POL4 BOOT	

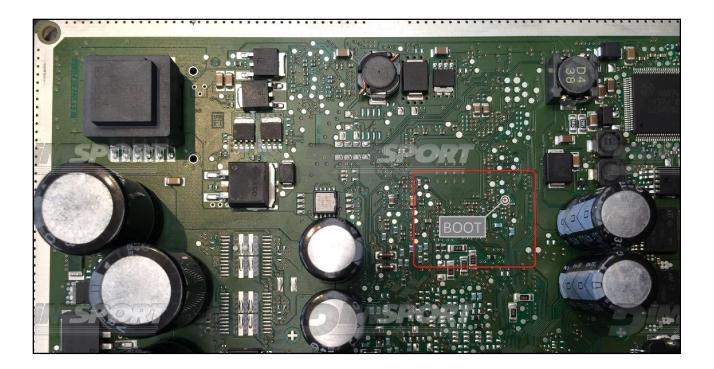

### **GPT CONNECTION**

Connect the GPT S1 & GPT S2 pins to the specific wires of the F34NTA15 flat cable as shown in the following picture.

PIN / Colore PIN / Coulor	DESCRIZIONE DESCRIPTION
	GPT_S2
	GPT_S1

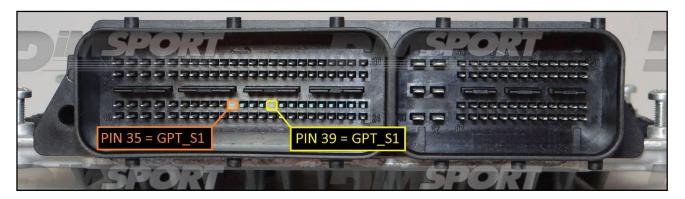

## **DIMA BNP CONNECTION**

