

BOSCH EDC17C79 IROM TC1797 GPT FCA

plugin 816 BOSCH EDC17C79 IROM TC1797 GPT
FCA

CONNESSIONI con MODALITA' GPT

Per utilizzare la modalità connessione GPT è necessario utilizzare sia la ANALOG PORT sia la DIGITAL PORT.

GPT connection with loose wires

Connect the F32GN037 cable to the **ANALOG PORT**


Connect the F34NTA15 to the **DIGITAL PORT**, use the YELLOW and ORANGE wires ONLY for the GPT signals as displayed in the following pictures.

GPT connection with DIMA

Connect the F32GN038 cable to the **ANALOG PORT**


Connect the F34NTA15 to the **DIGITAL PORT**, use the YELLOW and ORANGE wires ONLY for the GPT signals as displayed in the following pictures.

F34NTA15

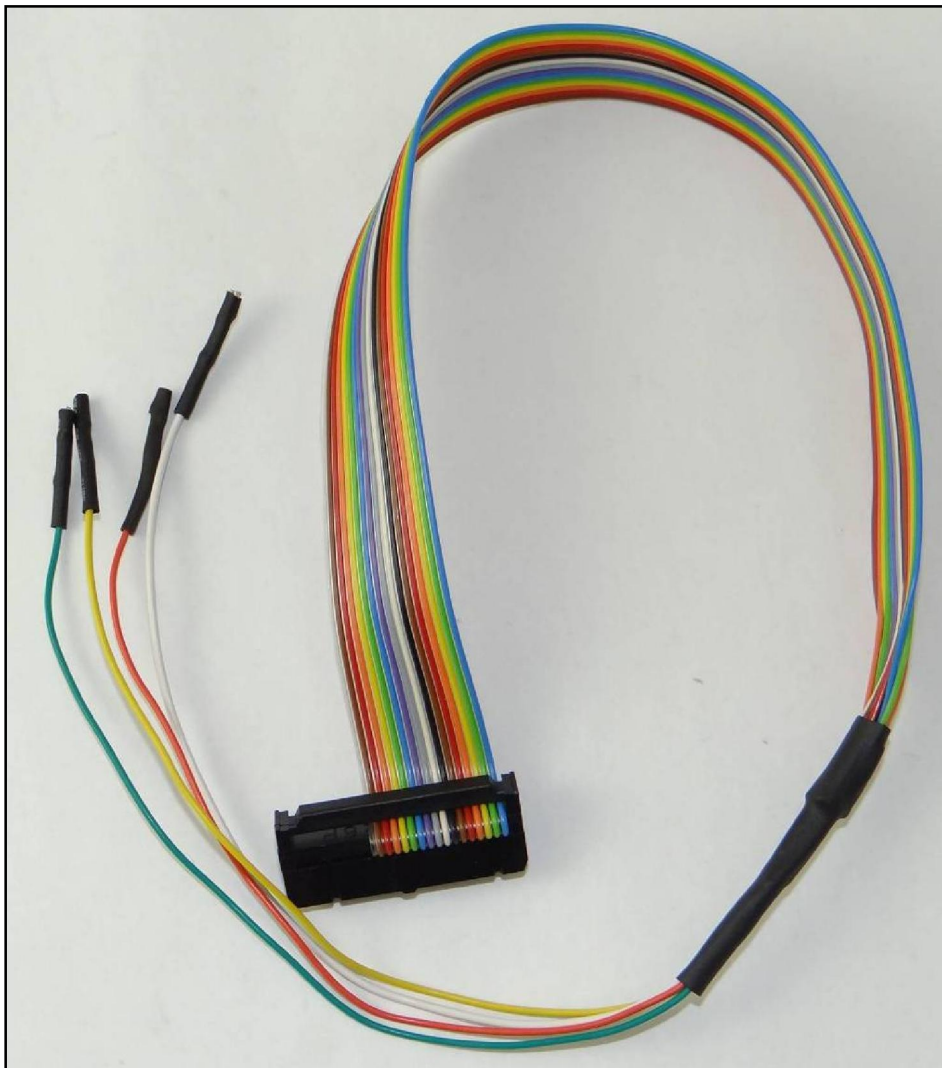

BOSCH EDC17C79 IROM TC1797 GPT FCA

EDC17C79

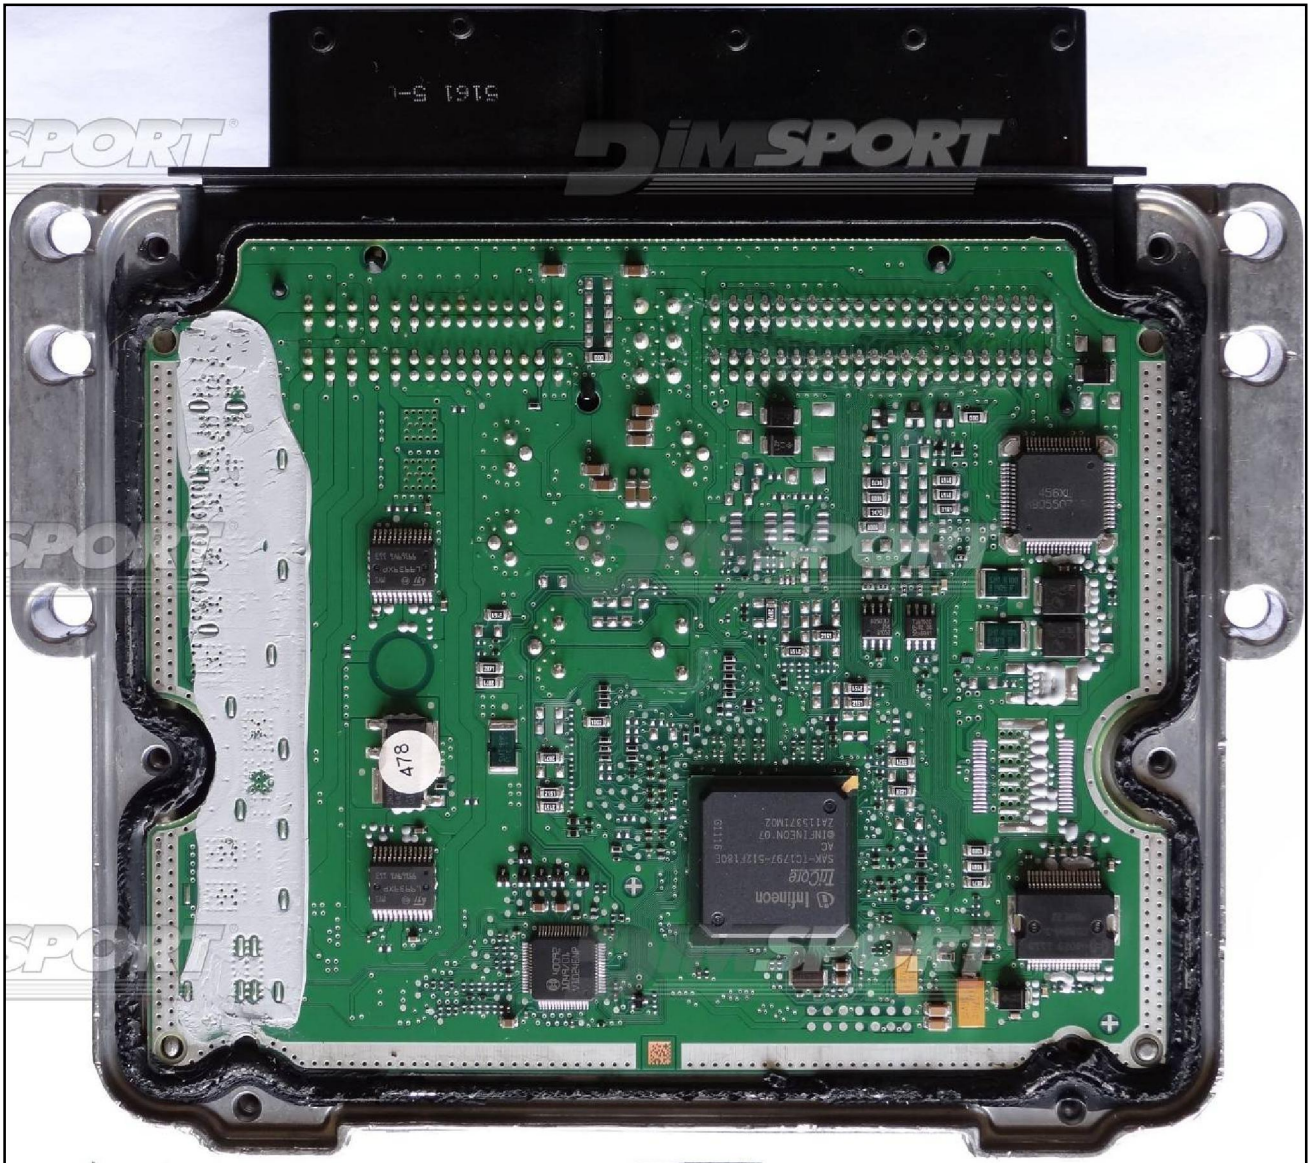


BOSCH EDC17C79 IROM TC1797 GPT FCA

For the connection use the cable F32GN037C connected to the ECU.

Make sure that the POWER led (red) on Trasdata is ON.

Do not use this connection with the DIMA, it will be the F34DM011 to power the ECU.


COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
■ ROSSO RED	POSITIVO DIRETTO POWER BATTERY
■ ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
■ NERO BLACK	MASSA GND
■ GIALLO YELLOW	KLINE
■ VERDE GREEN	CAN LOW
■ BIANCO WHITE	CAN HIGH
■ GRIGIO GREY	POL4 BOOT
■ BLU BLUE	POL5 CNF1
■ VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
■ MARRONE BROWN	RESET

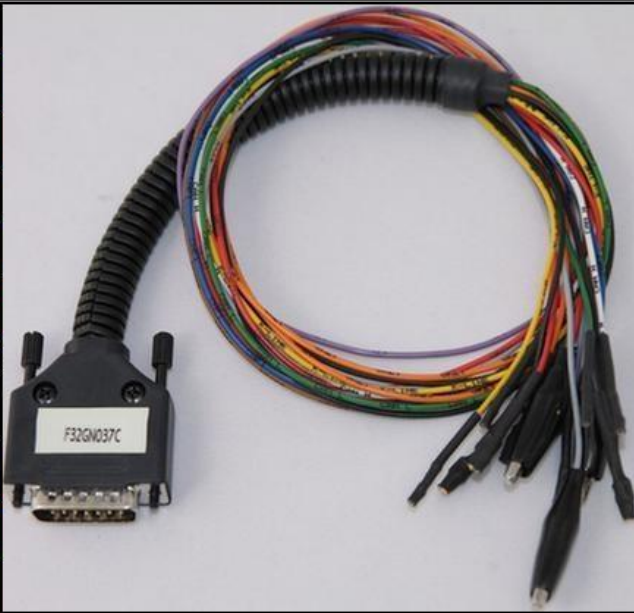

GPT DIRECT CONNECTION

GPT connection is required for the first time only, after the first ECU reading it is not necessary any longer. Connect the F34NTA15 flat cable to the GPT S1 & GPT S2 pins.

PIN / Colore PIN / Couleur	DESCRIZIONE DESCRIPTION
■	GPT_S2
■	GPT_S1

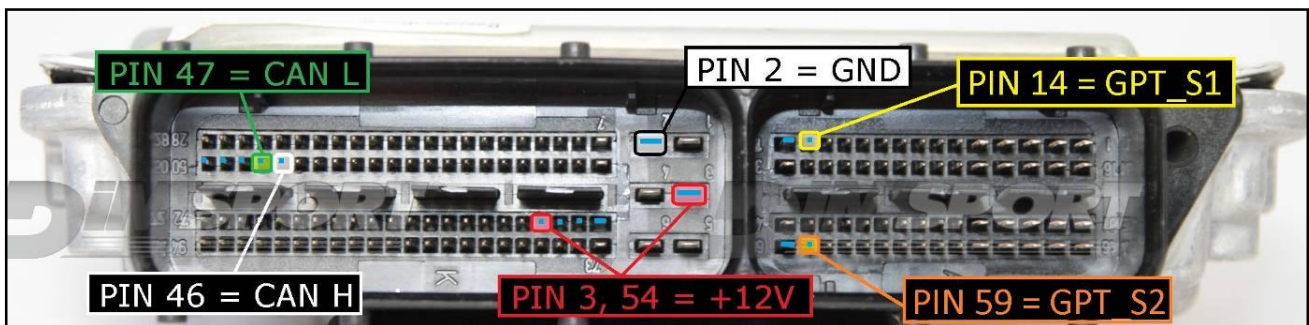


BOSCH EDC17C79 IROM TC1797 GPT FCA

DIRECT BOOT CONNECTION

Connect the GREY wire of the cable F32GN037C as shown in the picture.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
GRIGIO GREY	POL4 BOOT

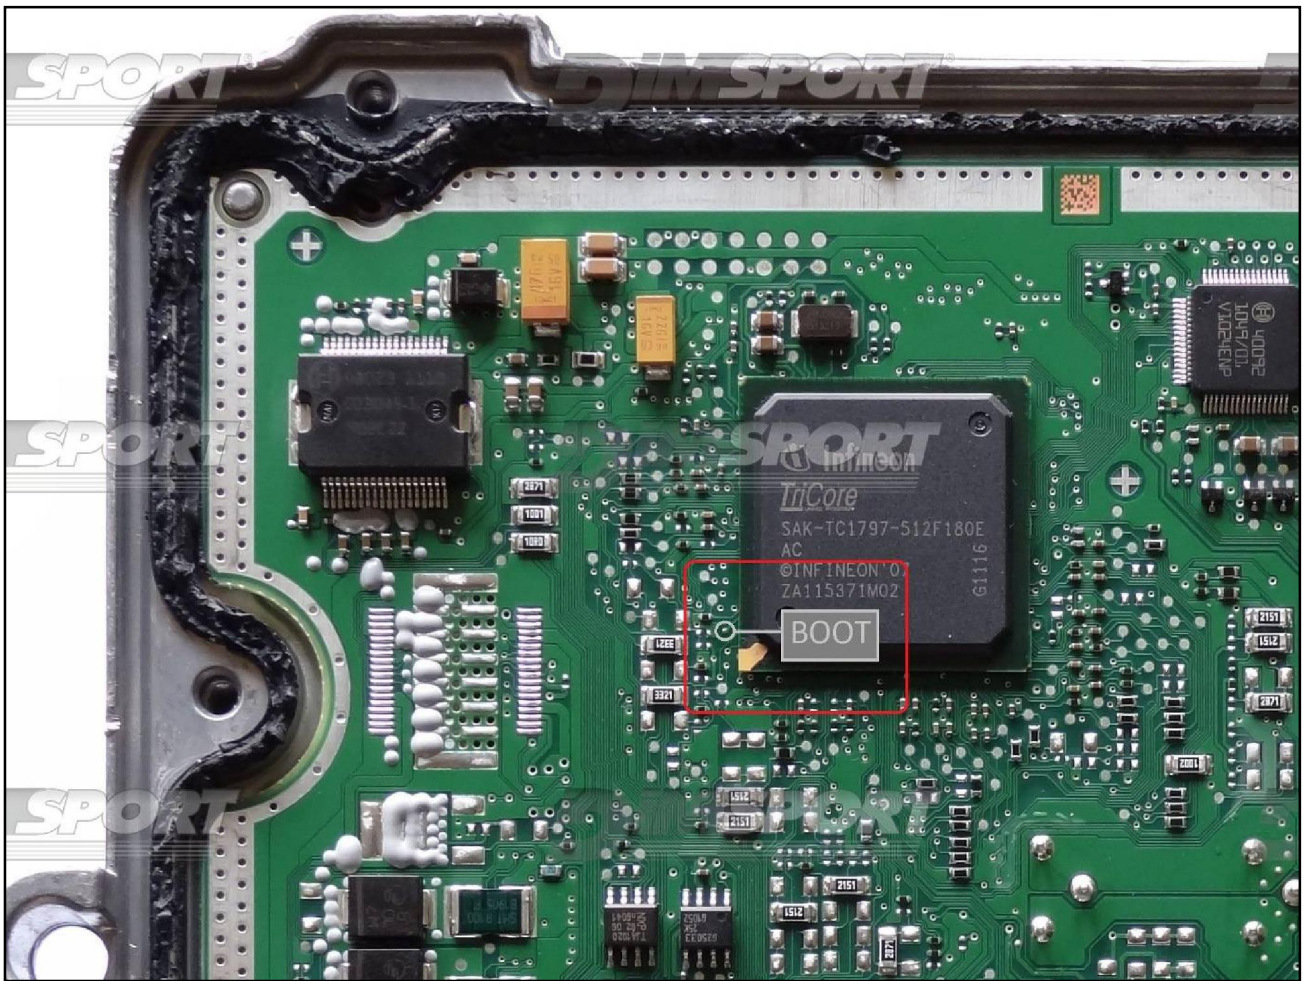

BOSCH EDC17C79 IROM TC1797 GPT FCA

DIMA CONNECTION

For the DIMA connection is required the F34DM011 DIMA adapter + the F32GN038 flat cable. Connect the F32GN038 FLAT cable to the ANALOG PORT and to the F34DM011 DIMA adapter. Connect the F34NTA15 flat cable to the DIGITAL PORT.

Perform the connections as shown in the previous detail at pg.4 using for the BOOT signal the specific clamp on the F34DM011 DIMA adapter (verify that the yellow BOOT switch present on the F34DM011 is set in position ON).

Perform then the GPT connections with the F34NTA15 flat cable as shown at pg.3 .

