


# FIAT ALFA BOSCH ME7.9.10

## FOR ALL FIRMWARE VERSION:

With protocol K or CAN:

PINOUT	
+12V	= PIN 6,70
GND	= PIN 1
K-LINE	= PIN 91
CAN L	= PIN 88
CAN H	= PIN 89

**FGTechnology**  
**Micro:** ST10F275  
**Driver:**  
 Driver K: ST10F273/5/6 BOOT MODE  
 Driver CAN: ST10F273/5/6 BOOT MODE \*CAN

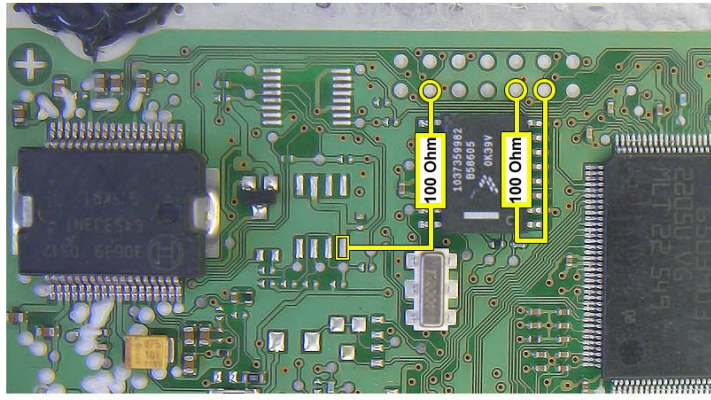


## SINCE FIRMWARE 53:

With protocol RX/TX: (USE THE RENESAS CABLE)

PINOUT	
+12V	= PIN 6,70
GND	= PIN 1

**FGTechnology**  
**Micro:** ST10F275  
**Driver:** ST10F273/5/6 BOOT MODE \*Rx Tx

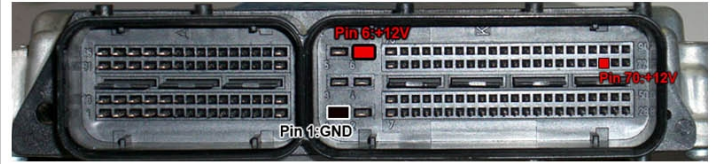

RX - White thread of the Renesas cable  
 TX - Violet thread of the Renesas cable  
 GND - Black thread of the Renesas cable

