plugin 618 : MED17.2.2 FORD / MEDG17.0 FORD






DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C. Make sure that the POWER led (red) on Trasdata is ON. Do not use this connection for the DIMA.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION	
ROSSO RED	POSITIVO DIRETTO POWER BATTERY	
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON	
NERO BLACK	MASSA GND	
GIALLO YELLOW	KLINE	
VERDE GREEN	CAN LOW	
BIANCO WHYTE	ICAN HIGH	
GRIGIO GREY	POL4 BOOT	F32GH037C
BLU BLUE	POL5 CNF1	Personal I
VIOLA/GRIGIC PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE	- SHARENS
MARRONE GREY	RESET	


ECU CONNECTOR

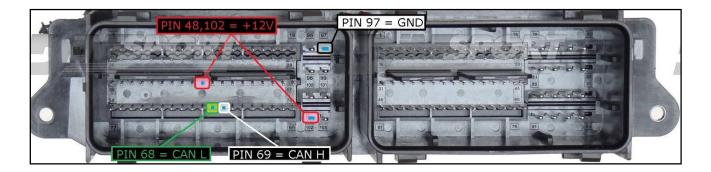

BOOT CONNECTION


Connect the GREY wire of the cable F32GN037C as described here below

COLORE FILO WIRE COLOUR		DESCRIZIONE DESCRIPTION	
	GRIGIO GREY	POL4 BOOT	

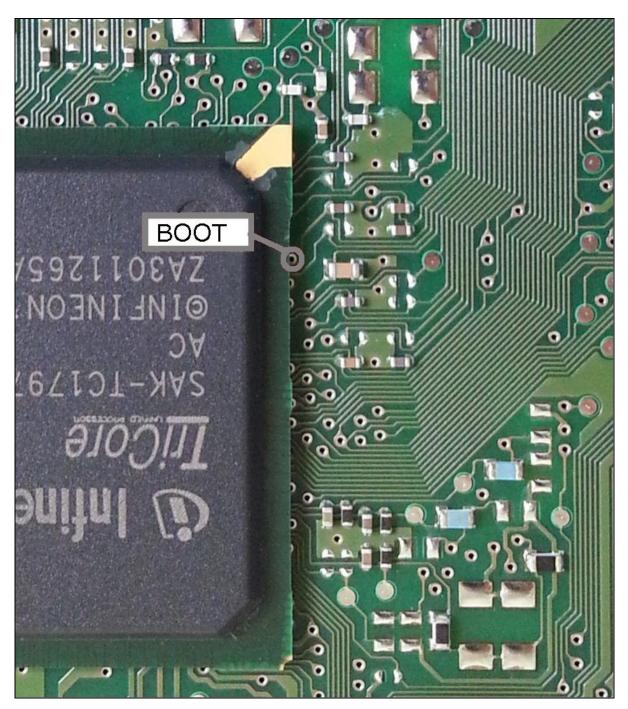

DIMA CONNECTION

Connect the boot pin to the pad n.10 of the soldering lay-by pins then verify that the switch BOOT present on the F34DM011 is set in position ON.

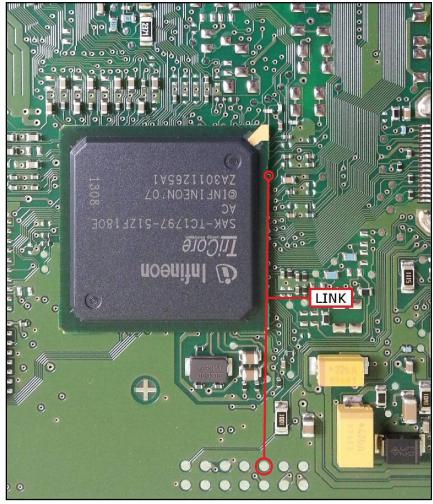

The following picture of the DIMA adapter F34DM011 connection is merely indicative.

