

BOSCH MED17.5.2 IROM TC1767 GPT VAG

plugin 689 BOSCH MED17.5.2 IROM TC1767 GPT
VAG


GPT CONNECTION MODE

To perform the GPT connection it is necessary to use both the ANALOG PORT and the DIGITAL PORT.

GPT connection with loose wires

Connect the F32GN037 cable to the **ANALOG PORT**

Connect the F34NTA15 to the **DIGITAL PORT**, use the YELLOW and ORANGE wires ONLY for the GPT signals as displayed in the following pictures.

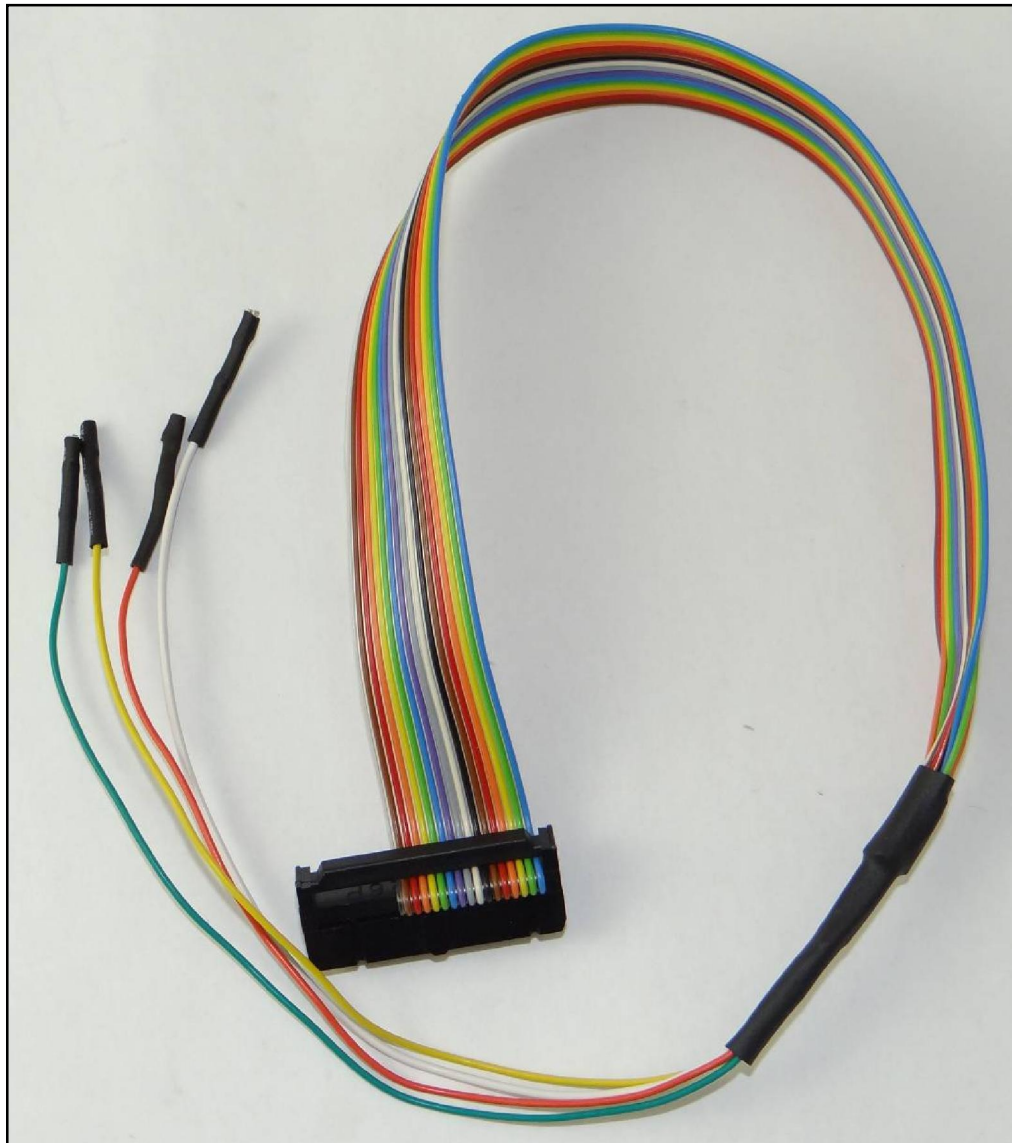


BOSCH MED17.5.2 IROM TC1767 GPT VAG

MED17.5.2



BOSCH MED17.5.2 IROM TC1767 GPT VAG

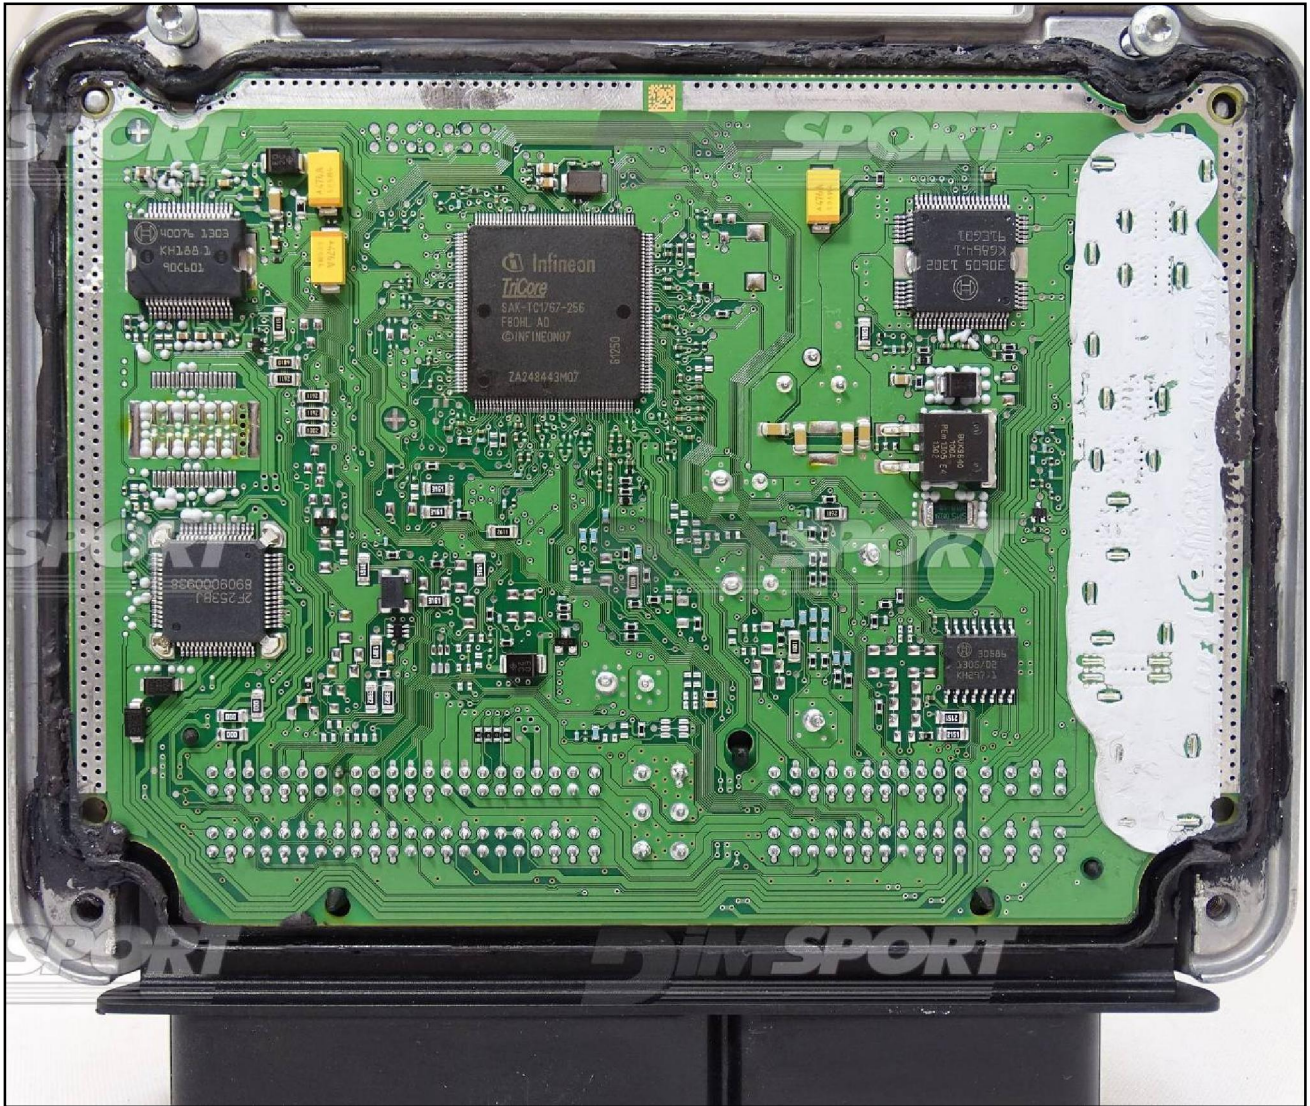

BOSCH MED17.5.2 IROM TC1767 GPT VAG



ECU CONNECTOR

For the connection use the cable F32GN037C connected to the ECU.

Make sure that the POWER led (red) on Trasdata is ON.

Do not use this connection with the DIMA, it will be the F34DM011 to power the ECU.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
ROSSO RED	POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK	MASSA GND
GIALLO YELLOW	KLINE
VERDE GREEN	CAN LOW
BIANCO WHITE	CAN HIGH
GRIGIO GREY	POL4 BOOT
BLU BLUE	POL5 CNF1
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
MARRONE BROWN	RESET

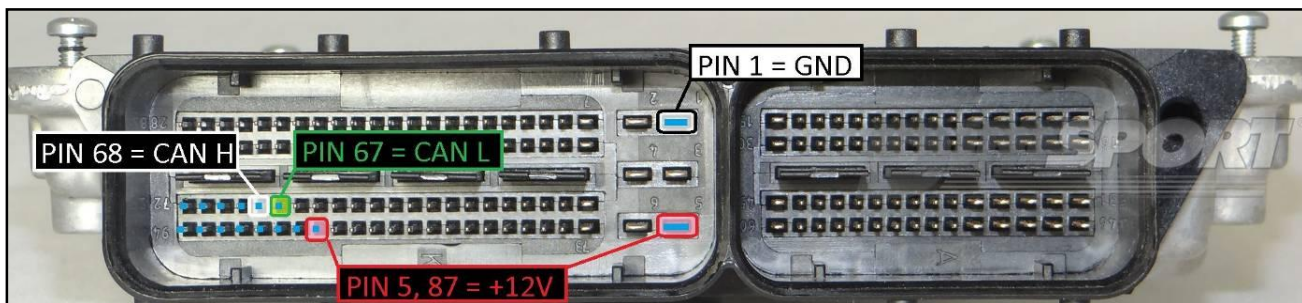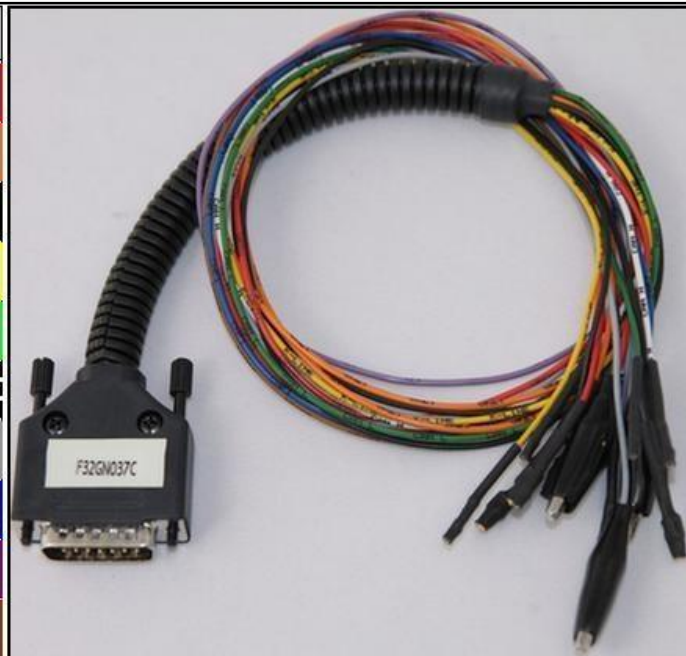


BOSCH MED17.5.2 IROM TC1767 GPT VAG

GPT CONNECTION

Connect the specific wires of the F34NTA15 flat cable to the GPT S1 & GPT S2 connector pins.

PIN / Colore PIN / Colour	DESCRIZIONE DESCRIPTION
Orange	GPT_S2
Yellow	GPT_S1

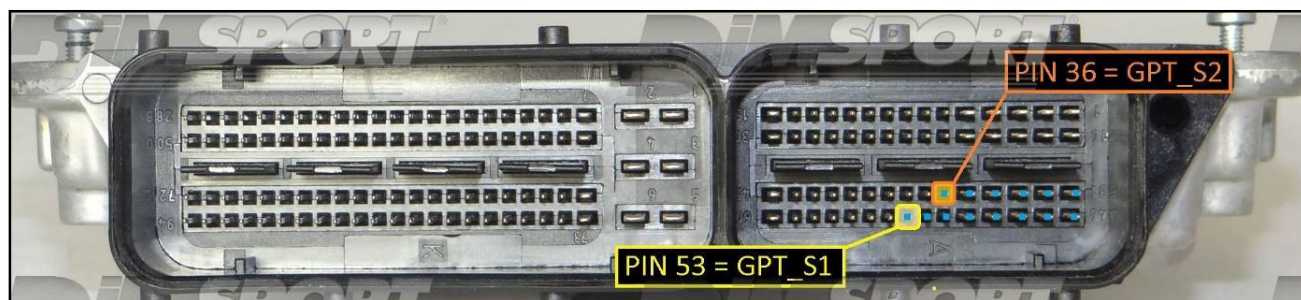


BOSCH MED17.5.2 IROM TC1767 GPT VAG

DIRECT BOOT CONNECTION

Connect the GREY&BLUE wires of the cable F32GN037C as shown in the picture.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
GRIGIO GREY	POL4 BOOT
BLU BLUE	POL5 CNF1

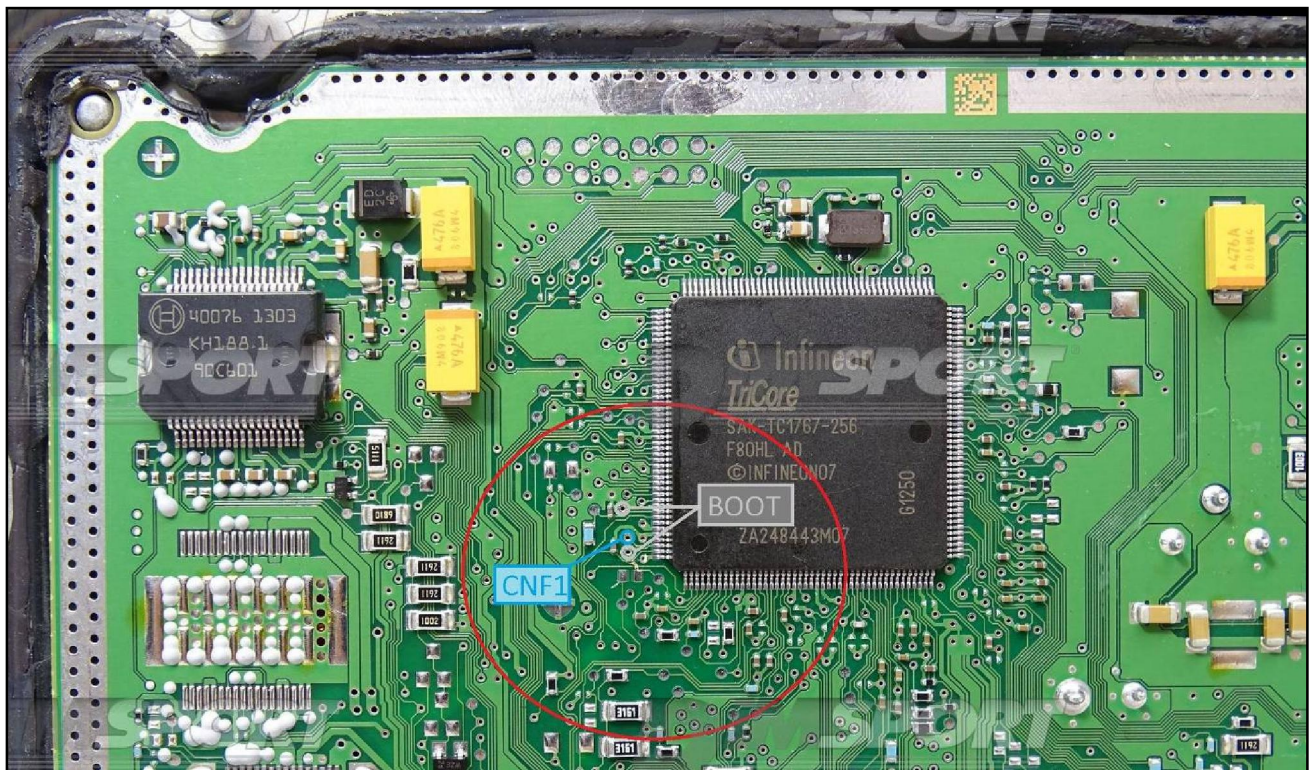

BOSCH MED17.5.2 IROM TC1767 GPT VAG

DIMA & DIMA BNP CONNECTION

For the DIMA connection is required the F34DM011 DIMA adapter + the F32GN038 flat cable. Connect the F32GN038 FLAT cable to the ANALOG PORT and to the F34DM011 DIMA adapter. Connect the F34NTA15 flat cable to the DIGITAL PORT.

Then perform the connections as shown in the previous detail at pg.6 using for the BOOT&CNF1 signals the specific clamps on the F34DM011 DIMA adapter (verify that the yellow BOOT switch present on the F34DM011 is set in position ON). Perform then the GPT connections with the F34NTA15 flat cable as shown at pg.5 .

