plugin 252 The lay-by pins are placed in the lower part of the ECU. Micro SH7055






DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C/D. Make sure that the POWER led (red) on Trasdata is ON. Use the same power connection with the DIMA too.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION		
ROSSO RED	POSITIVO DIRETTO POWER BATTERY		
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON		
NERO BLACK	MASSA GND		
GIALLO	KLINE		
VERDE GREEN	CAN LOW		
BIANCO WHITE	ICAN HIGH		
GRIGIO GREY	POL4 BOOT	F32GN037C	
BLU BLUE	POL5 CNF1	I Economit I	1000
VIOLA/GRI PURPLE/GR	GIO TENSIONE PROG. REY PROG. VOLTAGE	-MARMS	
MARRONE BROWN	RESET		

ECU CONNECTOR

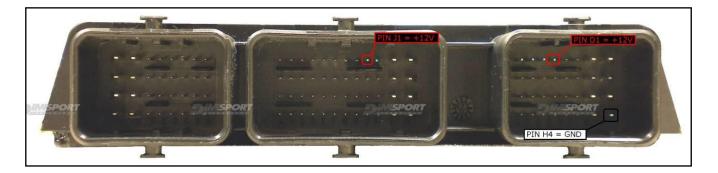


WARNING :

on this ECU you must use two different flat cables: one is for the READING procedure and one is for the WRITING procedure.

DIRECT CONNECTION – ECU READING:

For the READING procedure use the FLAT cable F34NTF53

	11 25 12 26	
Pin	Colore Colour	
11	Non usato Not used	
Structure of Control o	Not used Non usato	
12	Not used	
13	Non usato	
	Not used Non usato	
14	Not used	
15	Non usato	
15	Not used	
16	Blu Blue	
17	Viola	
17	Violet	
18	Grigio	
	Grey Bianco	
19	White	
20	Nero	
20	Black	
21	Marrone	
	Brown	
22	Rosso Red	
	Arancio	
23	Orange Giallo	
24	Giallo Yellow	
	Verde	
25	Green	
26	Non usato Not used	

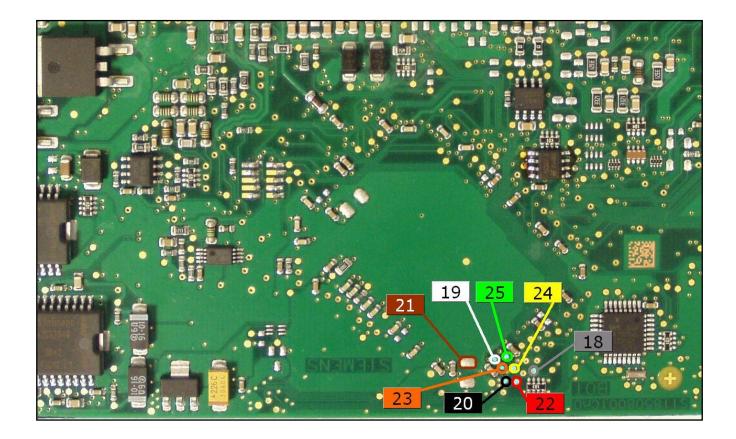

DIRECT CONNECTION – ECU WRITING:

For the WRITING procedure use the FLAT cable F34NTF51

Pin	Colore	
100020	Colour	
1	Marrone	
	Brown	
2	Non usato	
1.000	Not used	
3	Non usato	
	Not used Giallo	
4	Yellow	
	Verde	
5	Green	
	Blu	
6	Blue	
7	Viola	
1	Violet	
8	Grigio	
	Grey	
9	Bianco	
-	White	and the second s
10	Nero	
	Black	

