
plugin 1545 DELPHI DCM7.1A TC297TP IROM PSA plugin 1661 DELPHI DCM7.1B TC297TP 96 OPEL/PSA/TOYOTA




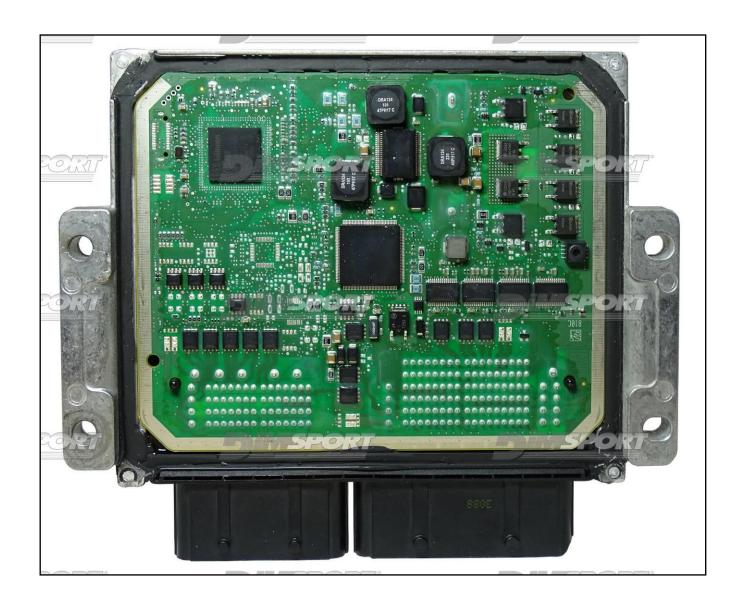

DIRECT CONNECTION

In order to connect to the ECU use the cable F32GN037C/D. Make sure that the POWER led (red) on Trasdata is ON.

COLORE FILO WIRE COLOUR		DESCRIZIONE DESCRIPTION	
ROS: RED	50	POSITIVO DIRETTO POWER BATTERY	
ARAI ORAI	1555	POSITIVO SOTTO QUADRO POWER SWITCH ON	
NER(10 m	MASSA GND	
GIAL YELL	0.000000	KLINE	
VERI GREE	775	CAN LOW	
BIAN WHIT	N7374 (1)	ICAN HIGH	9
GRIG GRE		POL4 BOOT	
BLU BLUE		POL5 CNF1	F 15
March 1997		TENSIONE PROG. PROG. VOLTAGE	-
MAR BROV	RONE WN	RESET	

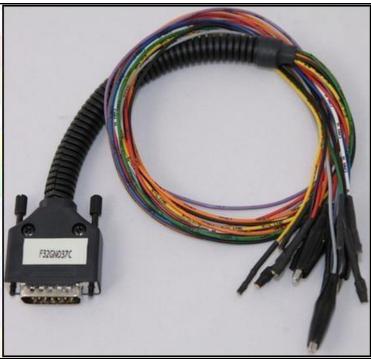



WARNING:

Due to the relevant power absorbed by the ECU at the beginning of the communication it is necessary to feed the ECU with an external power supply or a car battery. Connect the power cable F32GN003 to the Trasdata and then to the power source.


The ECU must be powered through the Trasdata using the F32GN037C/D cable.

DIRECT BOOT&CNF1 CONNECTION

One of the BOOT pins is placed under the microprocessor

WARNING: we recommend using and tilting a metal support rod with a needle to reach the BOOT pin located under the microprocessor.



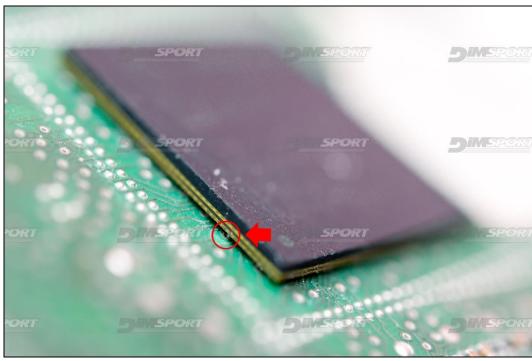

Connect the GREY&BLUE wires of the cable F32GN037C/D as shown in the picture.

COLORE FILO WIRE COLOUR		DESCRIZIONE DESCRIPTION	
	GRIGIO GREY	POL4 BOOT	
	BLU BLUE	POL5 CNF1	

