


DELPHI MPC561

plugin 079

The Lay-by pins are placed in the lower-left part of the ECU, as shown in the picture.


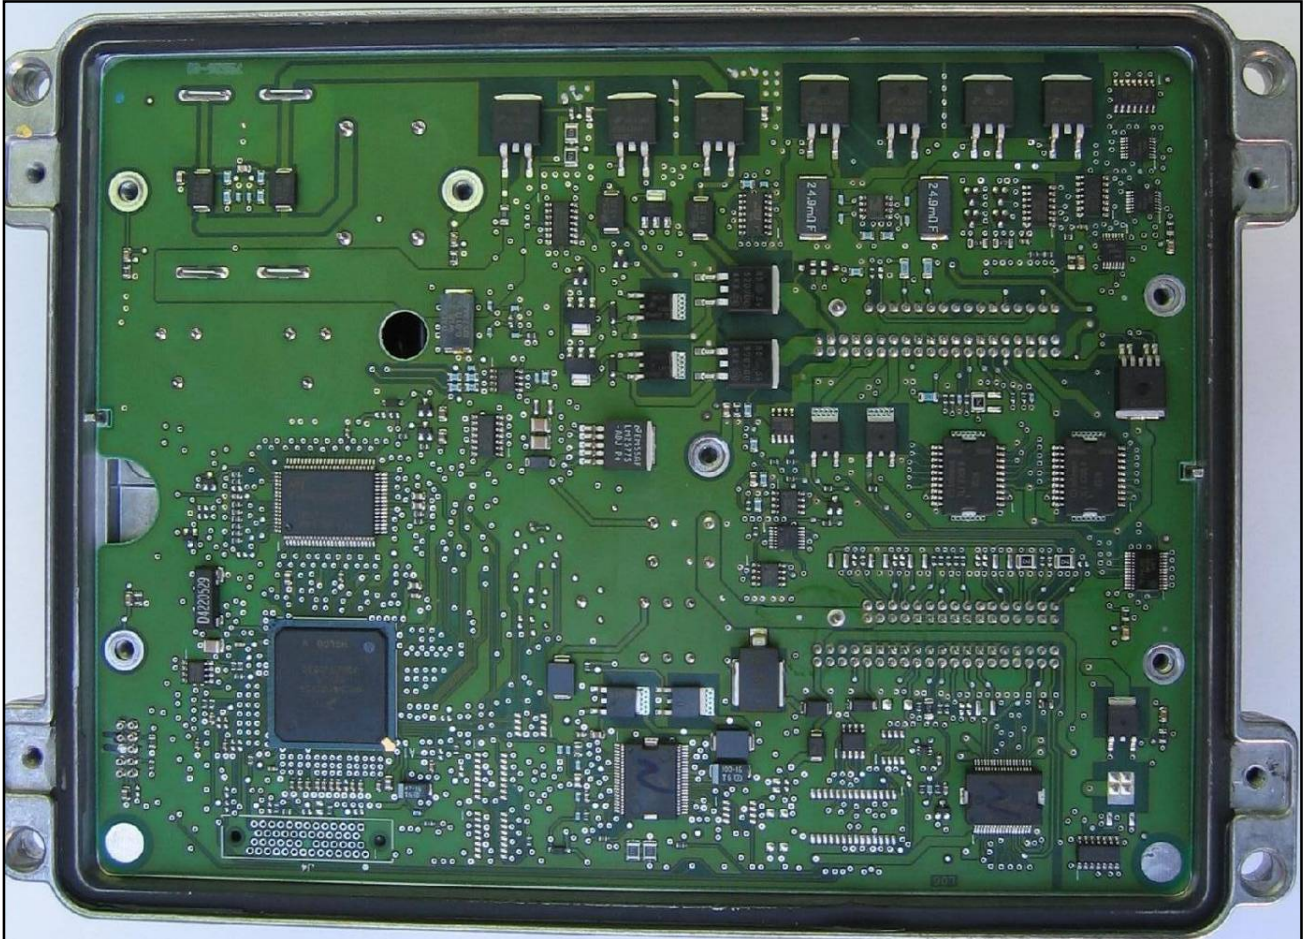


DELPHI MPC561

ECU CONNECTOR




In order to connect to the ECU use the CABLE F32GN037C.
Make sure that the POWER led (red) on Trasdata is ON.

COLORE FILO WIRE COLOUR		DESCRIZIONE DESCRIPTION
ROSSO RED		POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE		POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK		MASSA GND
GIALLO YELLOW		KLINE
VERDE GREEN		CAN LOW
BIANCO WHITE		CAN HIGH
GRIGIO GREY		POL4 BOOT
BLU BLUE		POL5 CNF1
VIOLA/GRIGIO PURPLE/GREY		TENSIONE PROG. PROG. VOLTAGE
MARRONE BROWN		RESET

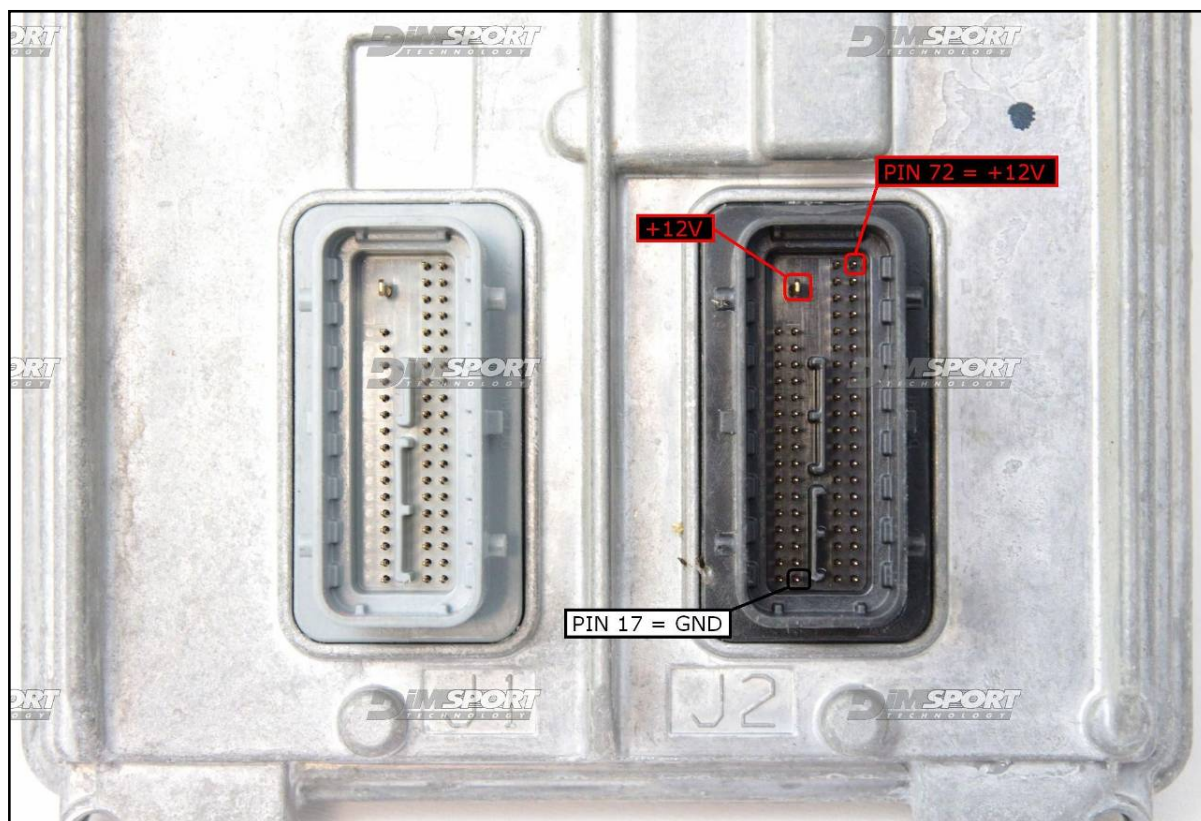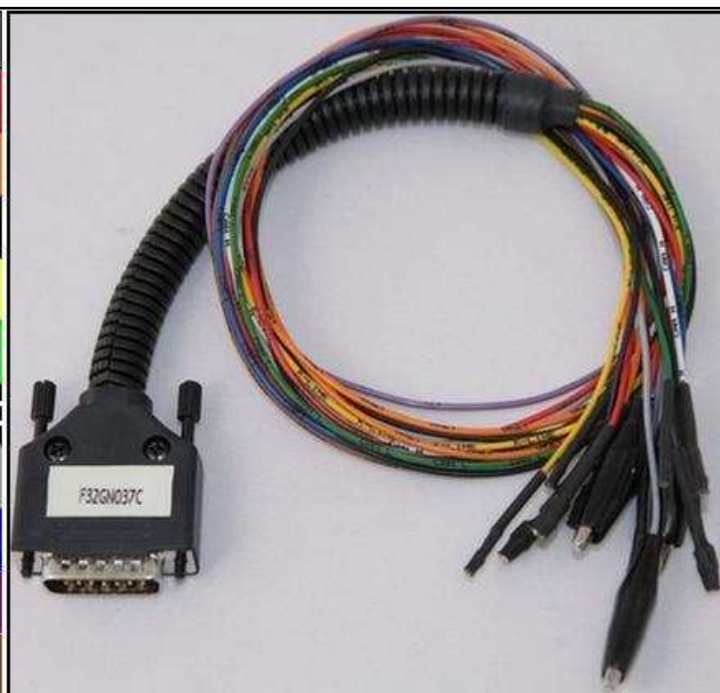

DELPHI MPC561

DIRECT CONNECTION with DELPHI F34NTA03 adapter

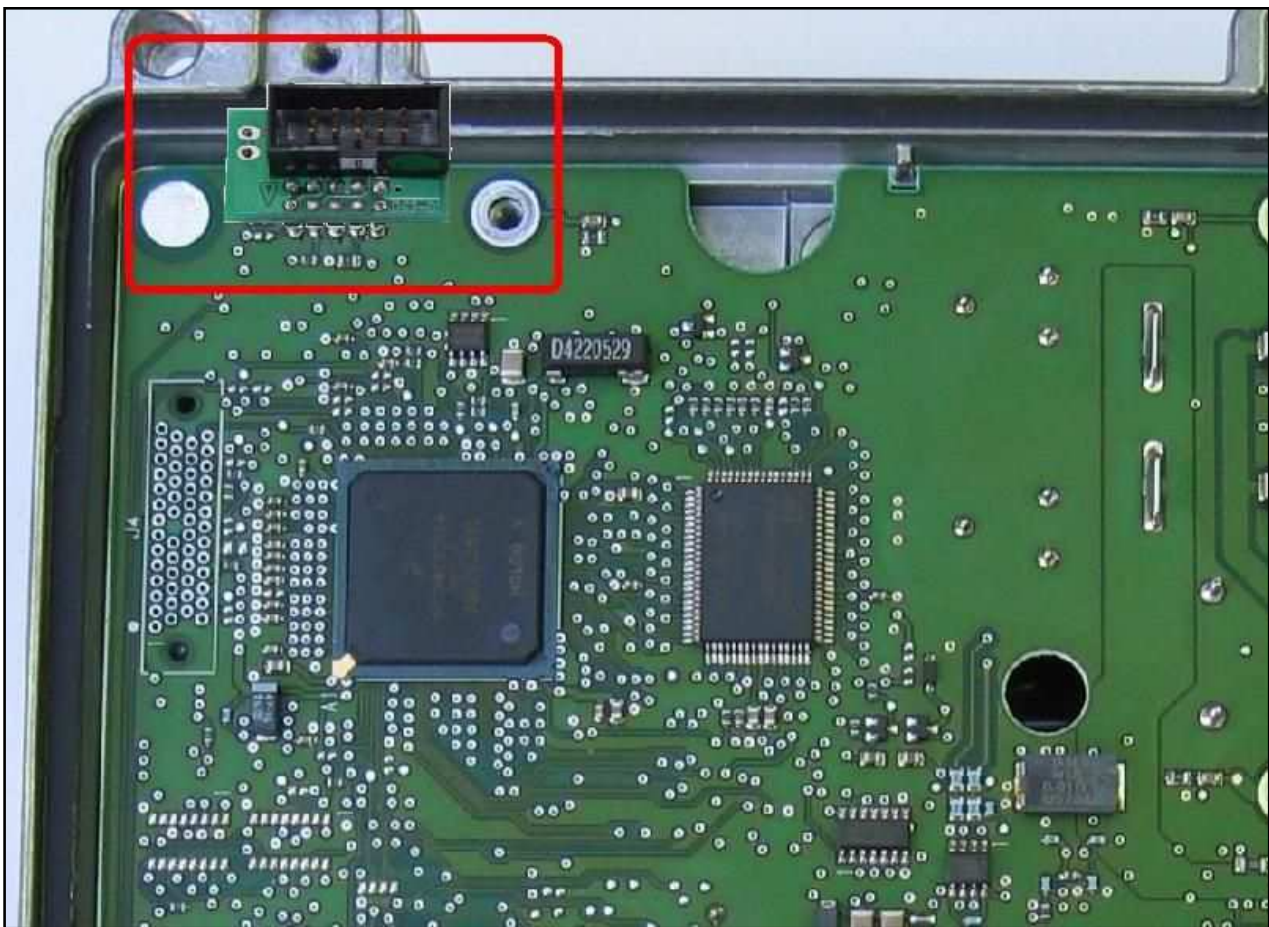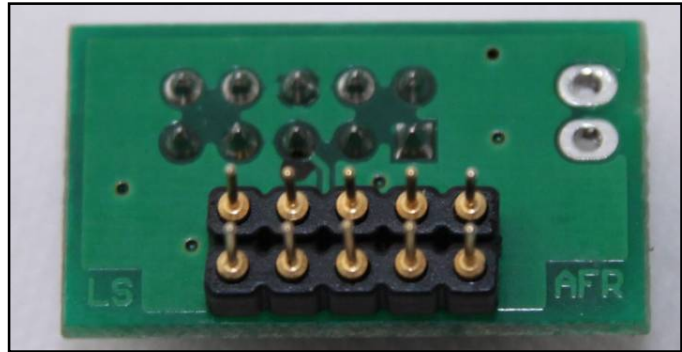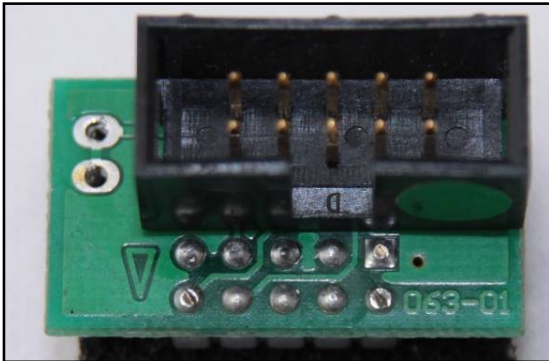

DELPHI MPC561

DIMA CONNECTION

Use the F34DM001 DIMA adapter as shown in the following pictures

