DENSO SH7055 39P-8591A-XX YAMAHA

plugin 849






DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C/D. Make sure that the POWER led (red) on Trasdata is ON USE this connection for the ECU READING ONLY

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION	
ROSSO RED	POSITIVO DIRETTO POWER BATTERY	
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON	
NERO BLACK	MASSA GND	
GIALLO YELLOW	KLINE	
VERDE GREEN	CAN LOW	
BIANCO WHITE	ICAN HIGH	
GRIGIO GREY	POL4 BOOT	F32GM037C
BLU BLUE	POL5 CNF1	Research (
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE	CHANNE
MARRONE BROWN	RESET	

ECU CONNECTOR

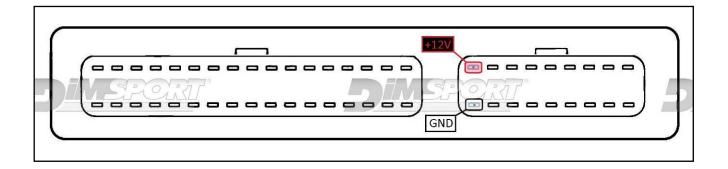

WARNING :

on this ECU you must use two different flat cables: one is for the READING procedure and one is for the WRITING procedure.

DENSO SH7055 39P-8591A-XX YAMAHA

DIRECT CONNECTION – ECU READING:

For the READING procedure use the FLAT cable F34NTF53

Pin	Colore Colour	
11	Non usato	
	Not used Non usato	
12	Not used	
+2	Non usato	
13	Not used	
14	Non usato	
<u></u>	Not used	
15	Non usato	
	Not used Non usato	
16	Not used	
17	Non usato	
17	Not used	
18	Grigio	
10	Grey	
19	Bianco White	
No. of State	Nero	
20	Black	
21	Marrone Brown	
22	Rosso	
	Red Arancio	
23	Orange	
24	Giallo	
24	Yellow	
25	Verde	
	Green Non usato	
26	Not used	

To get access to the communication pads for the reading procedure you must remove part of the silicon that covers the ECU board. After properly removing the silicon and before connecting the wirings please check that the vehicle starts fine and that there are no fault codes or warning lights on the dashboard.





DIRECT CONNECTION – ECU WRITING:

For the WRITING procedure use the cable F34NTA13 directly connected to the ECU. Make sure that the POWER led (red) on Trasdata is ON.

COLORE F		DESCRIZIONE DESCRIPTION	F34NTA13
	RRONE OWN	BOOT	WWW.dimsport.com
	BLU LUE	CNF	
GI	GIALLO YELLOW OR ALLO LLOW	RXD	and the second sec
GRIGIO GREY	VERDE GREEN	TXD	
)SSO RED	POSITIVO DIRETTO POWER BATTERY	
	ERO .ACK	MASSA GND	

