


DENSO SH7055 94661024 GM ISUZU

plugin 706 DENSO SH7055 94661024 GM/
ISUZU



DENSO SH7055 94661024 GM ISUZU

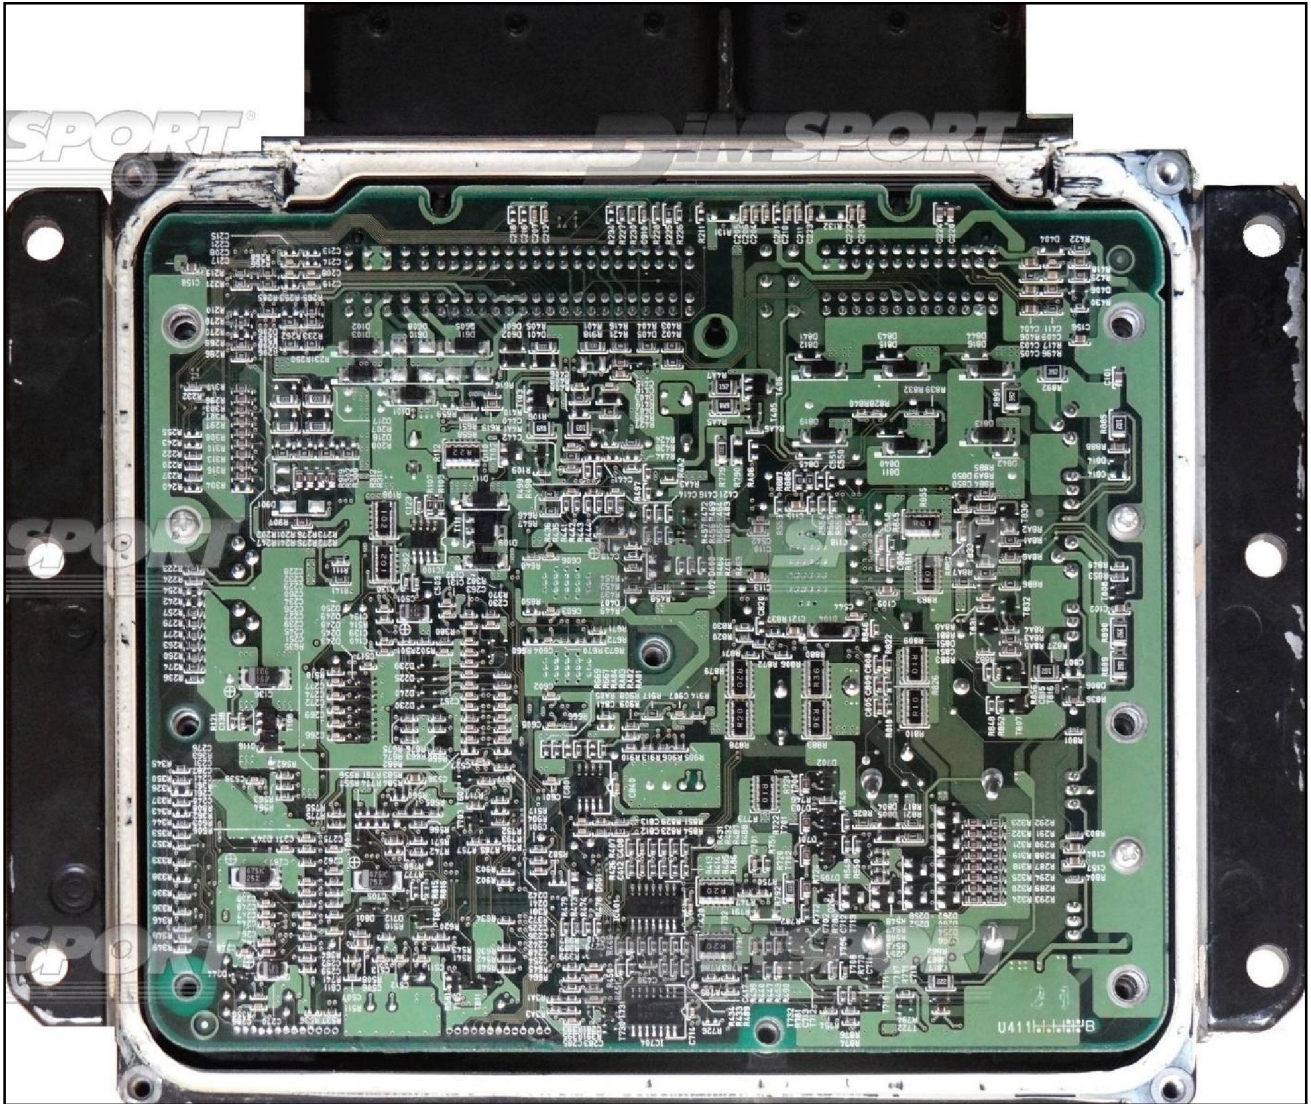


DENSO SH7055 94661024 GM ISUZU

DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C.
Make sure that the POWER led (red) on Trasdata is ON.

| COLORE FILO WIRE COLOUR | | DESCRIZIONE DESCRIPTION |
|-----------------------------|--|--|
| ROSSO RED | | POSITIVO DIRETTO POWER BATTERY |
| ARANCIO ORANGE | | POSITIVO SOTTO QUADRO POWER SWITCH ON |
| NERO BLACK | | MASSA GND |
| GIALLO YELLOW | | KLINE |
| VERDE GREEN | | CAN LOW |
| BIANCO WHITE | | CAN HIGH |
| GRIGIO GREY | | POL4 BOOT |
| BLU BLUE | | POL5 CNF1 |
| VIOLA/GRIGIO PURPLE/GREY | | TENSIONE PROG. PROG. VOLTAGE |
| MARRONE BROWN | | RESET |

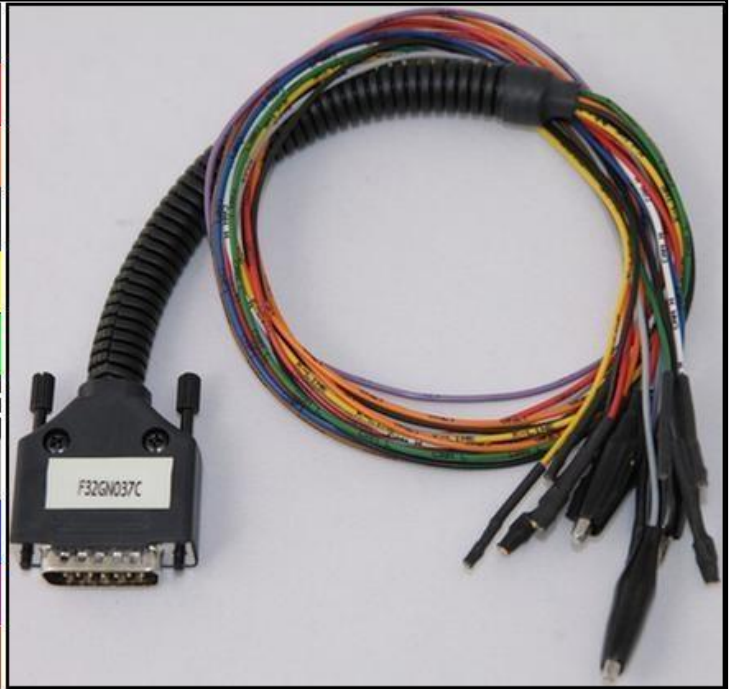

ECU CONNECTOR



WARNING :

on this ECU you must use two different flat cables: one is for the READING procedure and one is for the WRITING procedure.

DENSO SH7055 94661024 GM ISUZU

DIRECT CONNECTION – ECU READING:


For the READING procedure use the FLAT cable F34NTF53

| Pin | Colore Colour |
|-----|-----------------------|
| 11 | Non usato Not used |
| 12 | Non usato Not used |
| 13 | Non usato Not used |
| 14 | Non usato Not used |
| 15 | Non usato Not used |
| 16 | Non usato Not used |
| 17 | Non usato Not used |
| 18 | Grigio Grey |
| 19 | Bianco White |
| 20 | Nero Black |
| 21 | Marrone Brown |
| 22 | Rosso Red |
| 23 | Arancio Orange |
| 24 | Giallo Yellow |
| 25 | Verde Green |
| 26 | Non usato Not used |



DENSO SH7055 94661024 GM ISUZU


For a correct soldering procedure clean very well the soldering lay-by pins from the plastic film. We suggest you to use fine grit glass-paper smoothing by gentle pressure the connection lay by pins.

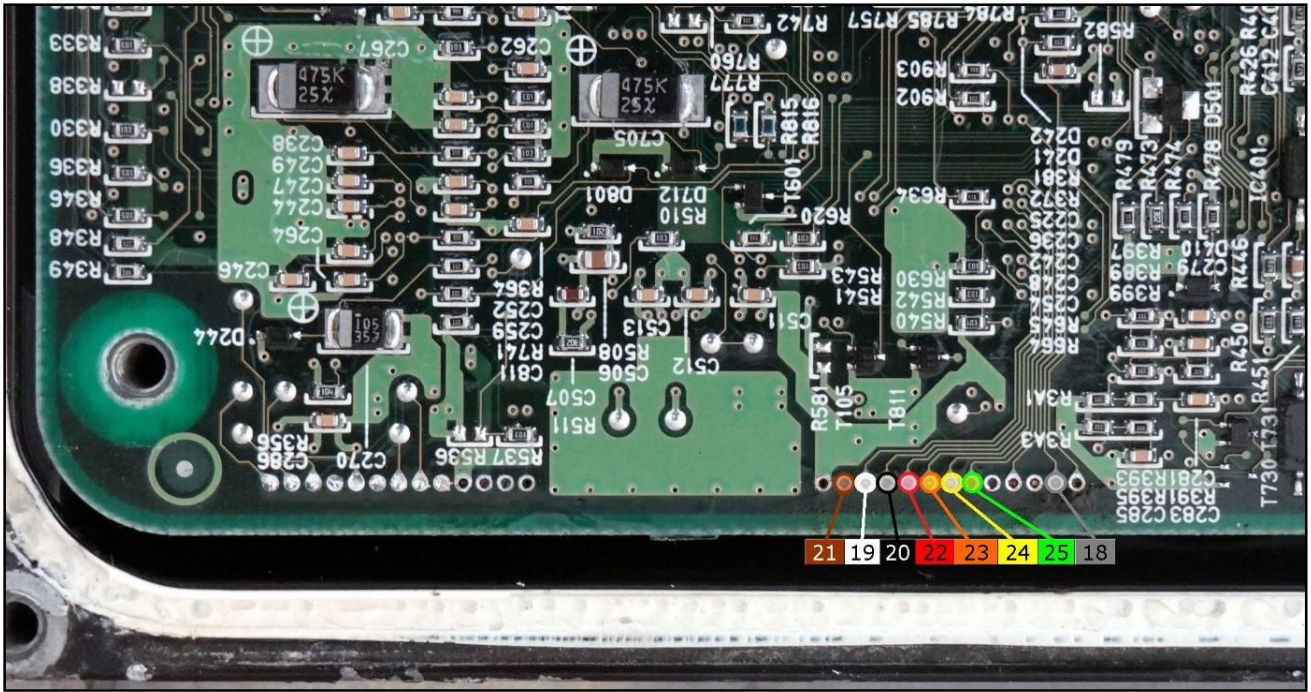


DENSO SH7055 94661024 GM ISUZU

DIRECT CONNECTION – ECU WRITING:

For the WRITING procedure use the FLAT cable F34NTF51

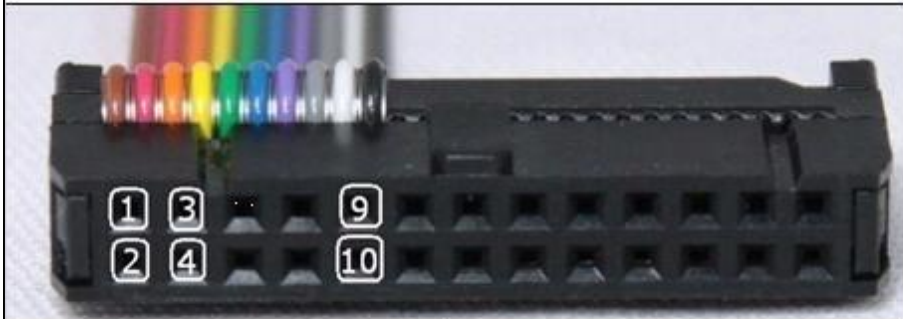

| Pin | Colore Colour |
|-----|-----------------------|
| 1 | Marrone Brown |
| 2 | Non usato Not used |
| 3 | Non usato Not used |
| 4 | Non usato Not used |
| 5 | Verde Green |
| 6 | Blu Blue |
| 7 | Viola Violet |
| 8 | Grigio Grey |
| 9 | Non usato Not used |
| 10 | Nero Black |

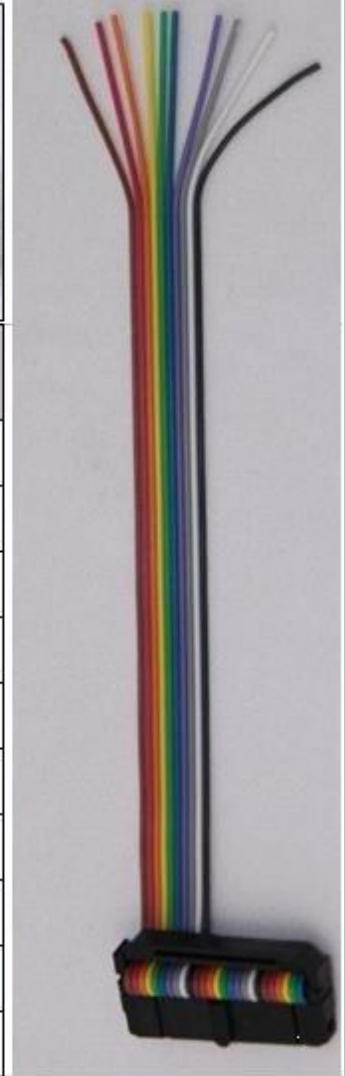

DENSO SH7055 94661024 GM ISUZU



For a correct soldering procedure clean very well the soldering lay-by pins from the plastic film. We suggest you to use fine grit glass-paper smoothing by gentle pressure the connection lay by pins.



DENSO SH7055 94661024 GM ISUZU

METAL POSITIONING FRAME CONNECTION – ECU READING

Power the ECU with the F32GN037C wiring. Use the adapter DIMA F34DM016.

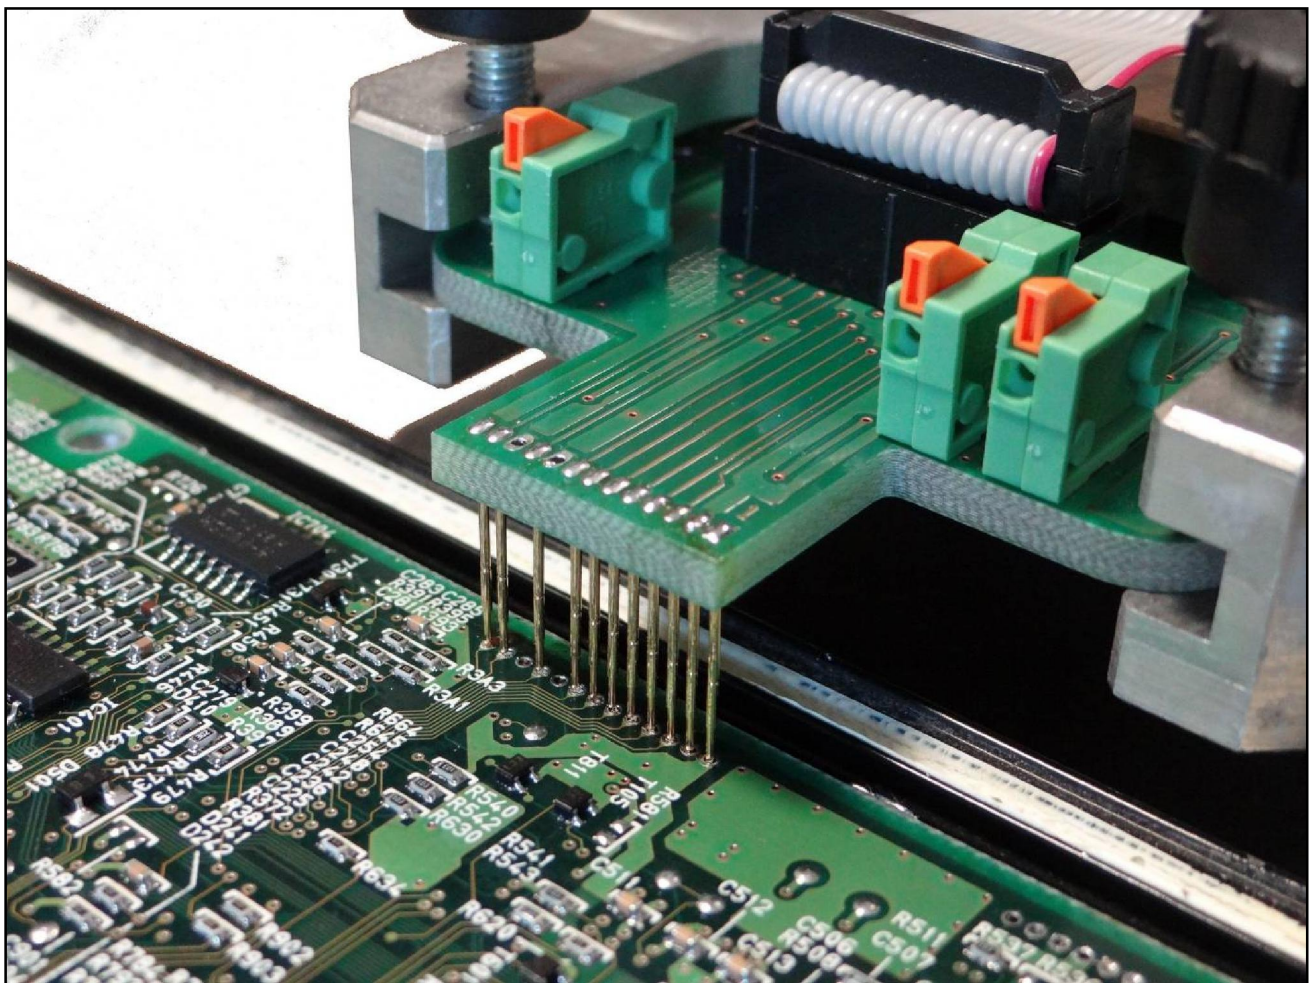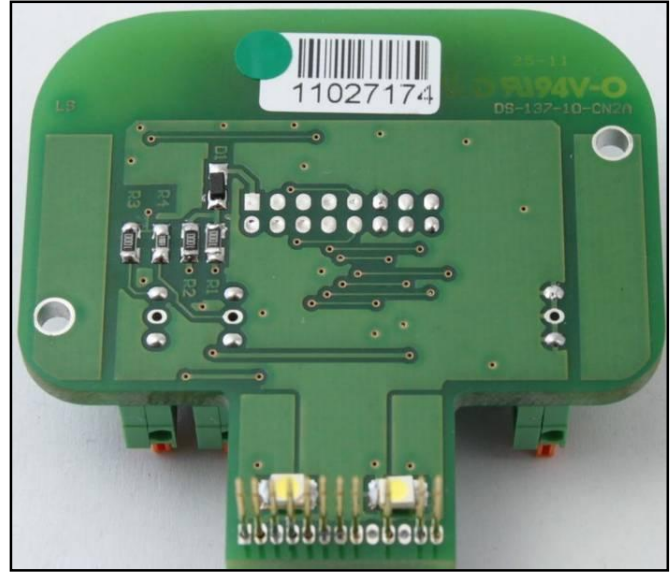

DENSO SH7055 94661024 GM ISUZU

METAL POSITIONING FRAME CONNECTION – ECU WRITING

Power the ECU with the F32GN037C wiring. Use the adapter DIMA F34DM019.

