PLUGIN 571








DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C. Make sure that the POWER led (red) on Trasdata is ON.

COLORE FILO	DESCRIZIONE
WIRE COLOUR	DESCRIPTION
ROSSO	POSITIVO DIRETTO
RED	POWER BATTERY
ARANCIO	POSITIVO SOTTO QUADRO
ORANGE	POWER SWITCH ON
NERO	MASSA
BLACK	GND
GIALLO YELLOW	KLINE
VERDE GREEN	CAN LOW
BIANCO WHITE	ICAN HIGH
GRIGIO	POL4
GREY	BOOT
BLU	POL5
BLUE	CNF1
VIOLA/GRIGIO	TENSIONE PROG.
PURPLE/GREY	PROG. VOLTAGE
MARRONE BROWN	RESET

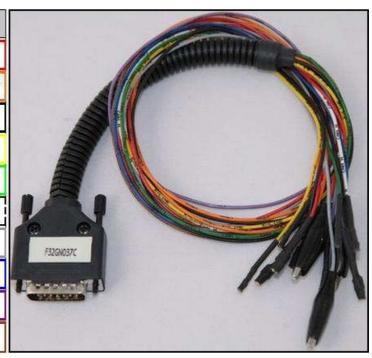

ECU CONNECTOR



WARNING:


on this ECU you must use two different flat cables: one is for the READING procedure and one is for the WRITING procedure

DIRECT CONNECTION - ECU READING:


For the READING procedure use the FLAT cable F34NTF53

The state of the s	11 25 12 26	
Pin	Colore Colour	
11	Non usato	
Production (Control of Control of	Not used Non usato	
12	Not used	
13	Non usato	
	Not used Non usato	
14	Not used	
15	Non usato	
AVE 470 T	Not used Blu	
16	Blue	
17	Viola	
	Violet Grigio	
18	Grey	
19	Bianco	
(0.4545)	White	
20	Nero Black	
21	Marrone Brown	
22	Rosso Red	
976	Arancio	
23	Orange	
24	Giallo Yellow	
25	Verde	
1000	Green	
26	Non usato Not used	

For a correct soldering procedure clean very well the soldering lay by pins from the plastic film. We suggest you to use a fine grit glass paper smoothing by gentle pressure the connection of the lay by pins. For the reading procedure it is necessary to perform all the LINK shown in the picture here below. At the end of the reading procedure remove all the LINK.

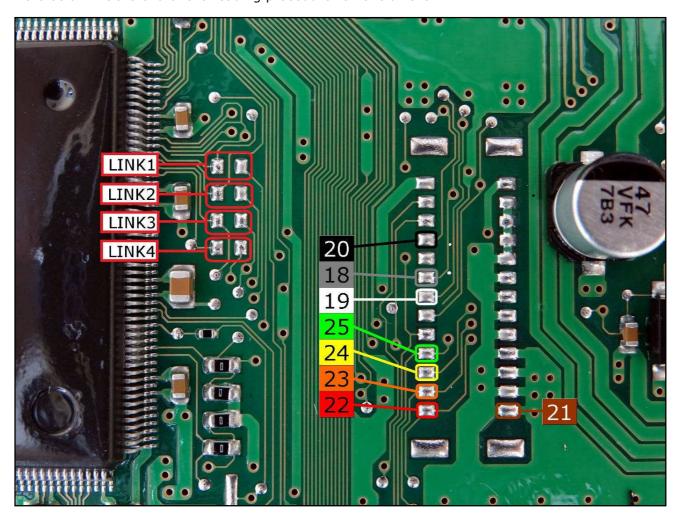

Connect the BLUE pin 16 on the other side of the board.

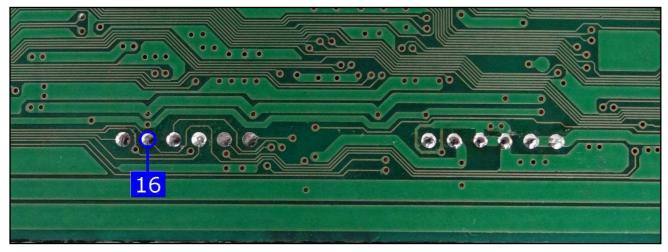

DIRECT CONNECTION - ECU WRITING:

For the WRITING procedure use the FLAT cable F34NTF51

1 3 9 2 4 10		
Pin	Colore	
5,23,000)	Colour	
1	Marrone	
*	Brown	
2	Non usato	
100	Not used Non usato	
3	Not used	
4	Giallo	
4	Yellow	
5	Verde	
3	Green	
6	Blu	
	Blue	
7	Viola Violet	
	Grigio	
8	Grey	
0	Bianco	
9	White	
10	Nero	
10	Black	I S MAIN EN EXECUTION

For a correct soldering procedure clean very well the soldering lay by pins from the plastic film. We suggest you to use a fine grit glass paper smoothing by gentle pressure the connection of the lay by pins.

