
plugin 078,083


The lay by pins are placed in the lower side of the ECU as shown in the picture here below.

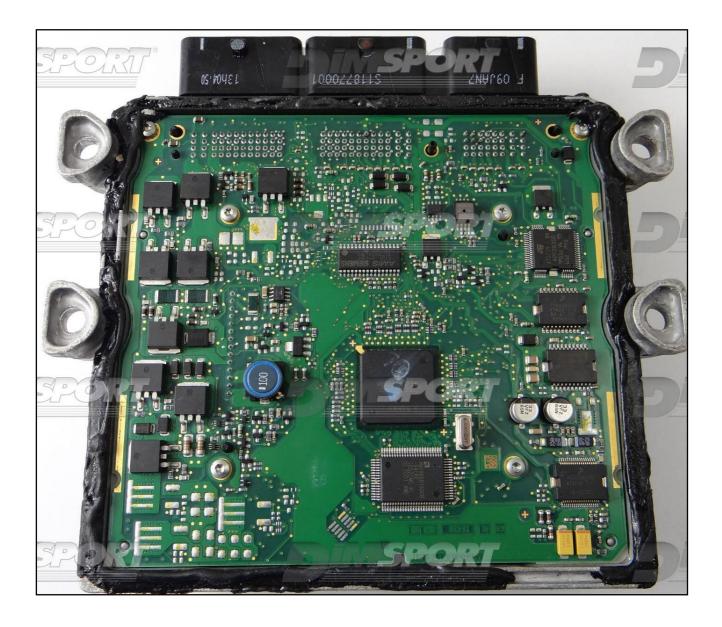

ECU CONNECTOR

In order to connect to the ECU use the CABLE F32GN037C. Make sure that the POWER led (red) on Trasdata is ON.


| COLORE FILO WIRE COLOUR | DESCRIZIONE DESCRIPTION | |
|-----------------------------|--|-----------|
| ROSSO RED | POSITIVO DIRETTO POWER BATTERY | |
| ARANCIO ORANGE | POSITIVO SOTTO QUADRO POWER SWITCH ON | |
| NERO BLACK | MASSA GND | |
| GIALLO YELLOW | KLINE | |
| VERDE GREEN | CAN LOW | |
| BIANCO WHITE | ICAN HIGH | |
| GRIGIO GREY | POL4 BOOT | F320M057C |
| BLU BLUE | POL5 CNF1 | Farment I |
| VIOLA/GRIGIO PURPLE/GREY | TENSIONE PROG. PROG. VOLTAGE | - CHANNE |
| MARRONE BROWN | RESET | |

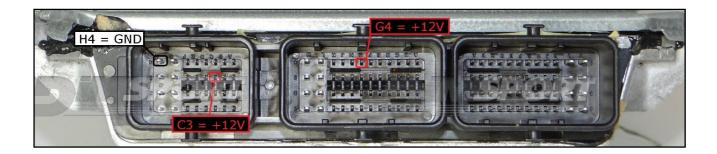



DIRECT CONNECTION with SIEMENS F34NTA006

Connect the adapter F34NTA006 as shown in the picture here below.

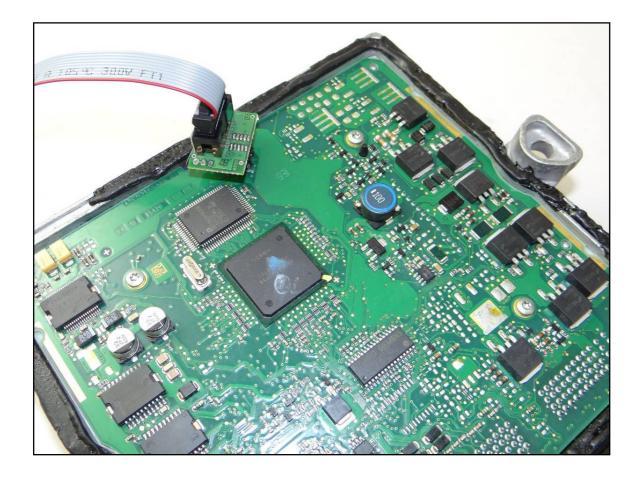

DIMA CONNECTION

It is necessary to connect the adapter F34DM003 on the F34DM004, be careful to the correct position of PIN 1.

