
plugin 1554



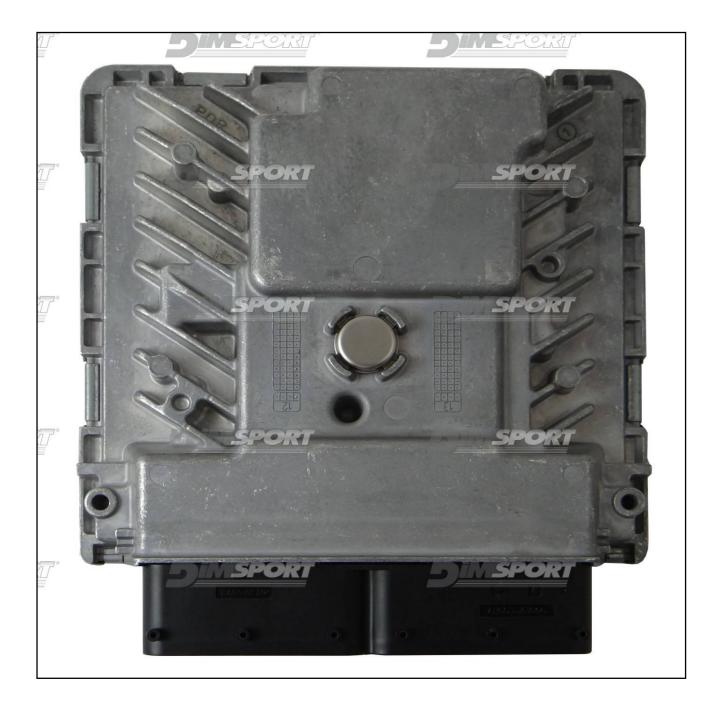


SSM CONNECTION

In order to use the SSM connection it is necessary to use both the ANALOG PORT and the DIGITAL PORT of the Trasdata.

LOOSE WIRES SSM CONNECTION

Connect the F32GN037C/D cable to the **ANALOG PORT** Connect the F34NTA18 cable to the **DIGITAL PORT**

F34NTA18

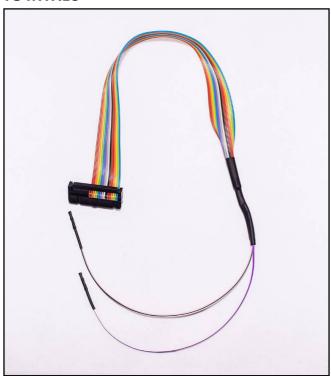

DIRECT CONNECTION

In order to connect to the ECU use the cable F32GN037C/D. Make sure that the POWER led (red) on Trasdata is ON.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION	
ROSSO RED	POSITIVO DIRETTO POWER BATTERY	
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON	
NERO BLACK	MASSA GND	
GIALLO YELLOW	KLINE	
VERDE GREEN	CAN LOW	
BIANCO WHITE	ICAN HIGH	
GRIGIO GREY	POL4 BOOT	F32OM037C
BLU BLUE	POL5 CNF1	[694]
<u> </u>	TENSIONE PROG. PROG. VOLTAGE	The state of the s
MARRONE BROWN	RESET	

ECU CONNECTOR

Perform the connections using F32GN037C/D and F343NTA18 as described here below:

PIN / Colore PIN / Coulor	DESCRIZIONE DESCRIPTION
	SSM_S1
	SSM_S2

