
BOSCH EDC7 C32 MAN

plugin 139

The lay by pins are in the lower part of the $\ensuremath{\mathsf{ECU}}$

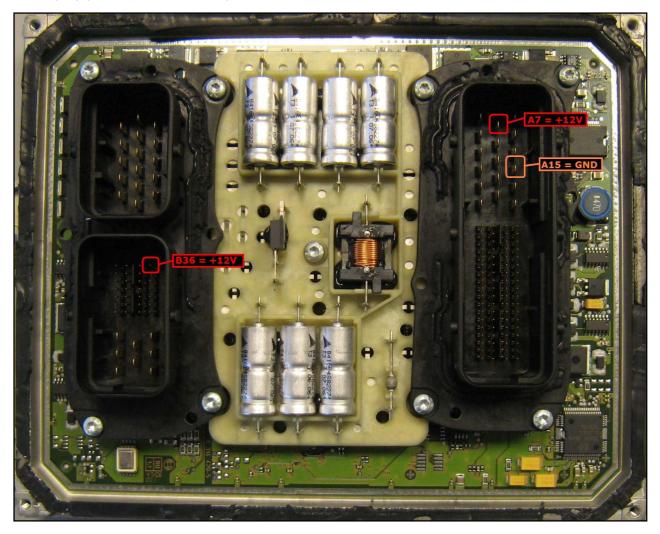

BOSCH EDC7 C32 MAN

ECU CONNECTOR

In order to connect to the ECU use the CABLE F32GN037C/D. Make sure that the POWER led (red) on Trasdata is ON.

COLORE FILO WIRE COLOUR		DESCRIZIONE DESCRIPTION
	ROSSO RED	POSITIVO DIRETTO POWER BATTERY
	ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
	NERO BLACK	MASSA GND
	GIALLO YELLOW	KLINE
	VERDE GREEN	CAN LOW
8	BIANCO WHITE	ICAN HIGH
	GRIGIO GREY	POL4 BOOT
	BLU BLUE	POL5 CNF1
		TENSIONE PROG. PROG. VOLTAGE
	MARRONE BROWN	RESET"



DIRECT CONNECTION

For the direct connection it is required the soldering adapter F34NTA06, please verify the PIN 1 of the board matches with the PIN 1 of the adapter.



BOSCH EDC7 C32 MAN

In order to connect properly the adapter it is necessary to extend the soldering strips as shown in the following picture. Due to the connectors plastic edge it is NOT possible to use the DIMA connection.

