

# plugin **600**



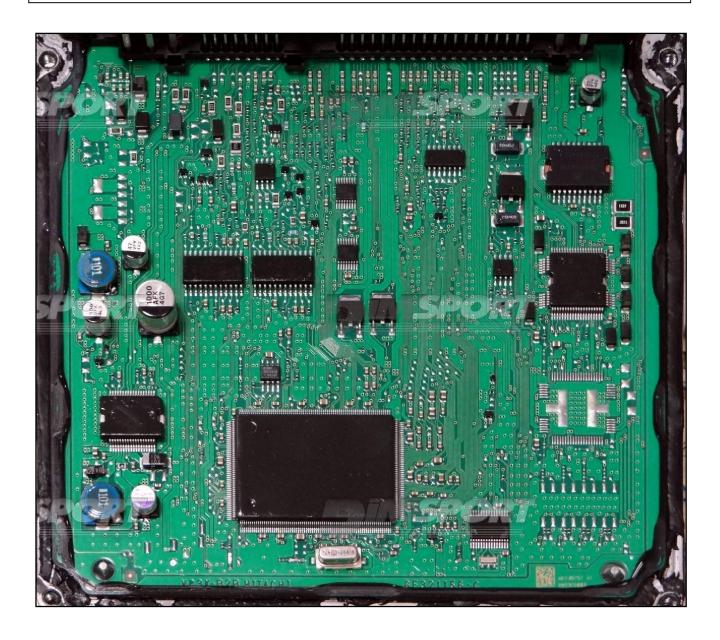

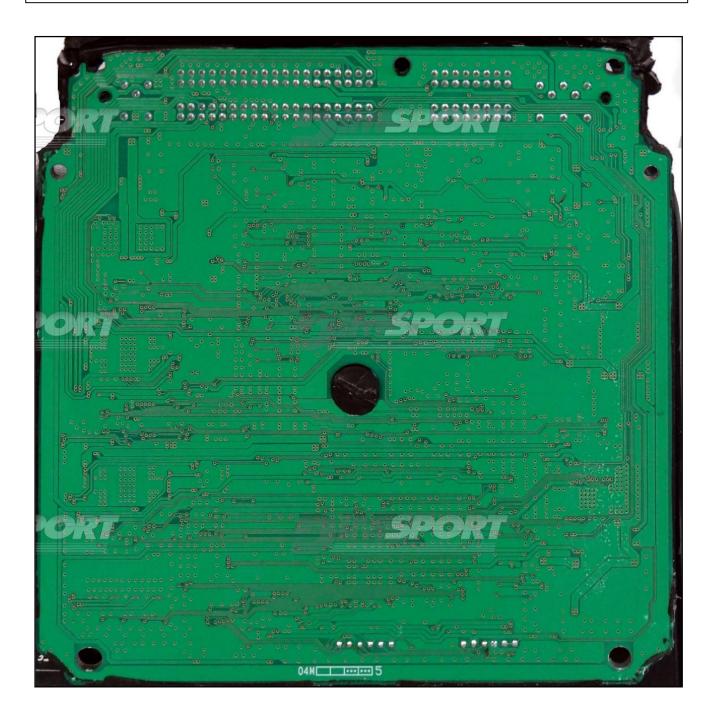


#### DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C. Make sure that the POWER led (red) on Trasdata is ON.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION	
ROSSO RED	POSITIVO DIRETTO POWER BATTERY	
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON	
NERO BLACK	MASSA GND	
GIALLO YELLOW	KLINE	
VERDE GREEN	CAN LOW	
BIANCO WHITE	ICAN HIGH	
GRIGIO GREY	POL4 BOOT	F32GM037C
BLU BLUE	POL5 CNF1	Bernard ()
	TENSIONE PROG. PROG. VOLTAGE	CHANNE
MARRONE BROWN	RESET	

#### ECU CONNECTOR

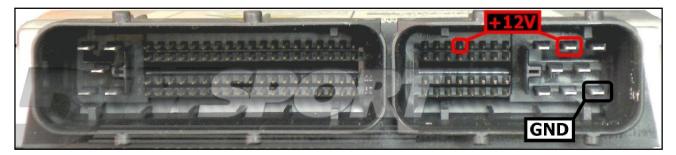


#### WARNING :


on this ECU you must use two different flat cables: one is for the READING procedure and one is for the WRITING procedure

#### **DIRECT CONNECTION – ECU READING:**

For the READING procedure use the FLAT cable F34NTF53

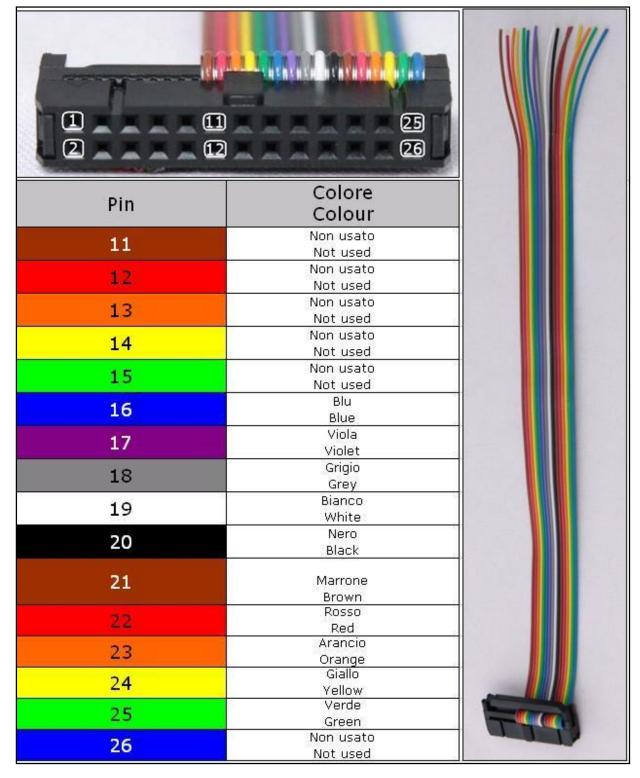

For a correct soldering procedure clean very well the soldering lay-by pins from the plastic film. We suggest you to use a fine grit glass-paper smoothing by gentle pressure the connection of the lay by pins.

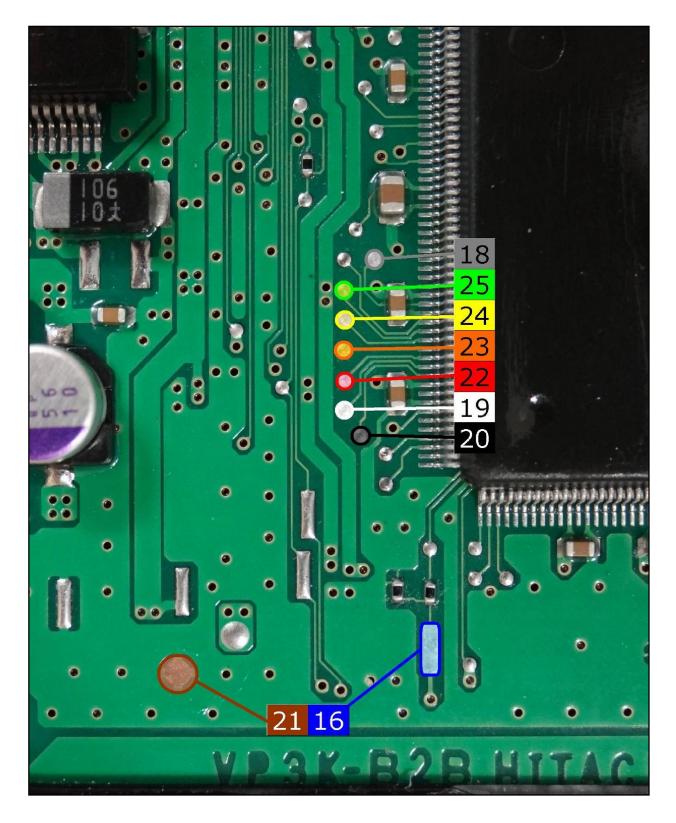

#### **DIRECT CONNECTION – ECU WRITING:**

For the WRITING procedure use the FLAT cable F34NTF51

Pin	Colore Colour	
1	Marrone Brown	
2	Non usato Not used	
3	Non usato Not used	
4	Giallo Yellow	
5	Verde Green	
6	Blu Blue	
7	Viola Violet	
8	Grigio Grey	
9	Bianco White	
10	Nero Black	

For a correct soldering procedure clean very well the soldering lay-by pins from the plastic film. We suggest you to use a fine grit glass-paper smoothing by gentle pressure the connection of the lay by pins.

