


PLUGIN 367, 368:NEW TRASDATA


This ECU is equipped with 2 Microprocessors and 2 Flash Eprom. We have created 2 different PLUGIN because in this way it is not possible to exchange the DIM files for the full writing. With the ECU connector faced bottom we define the RIGHT Flash as "R", instead the LEFT Flash will be "L". The engine maps are placed in the left Flash "L".

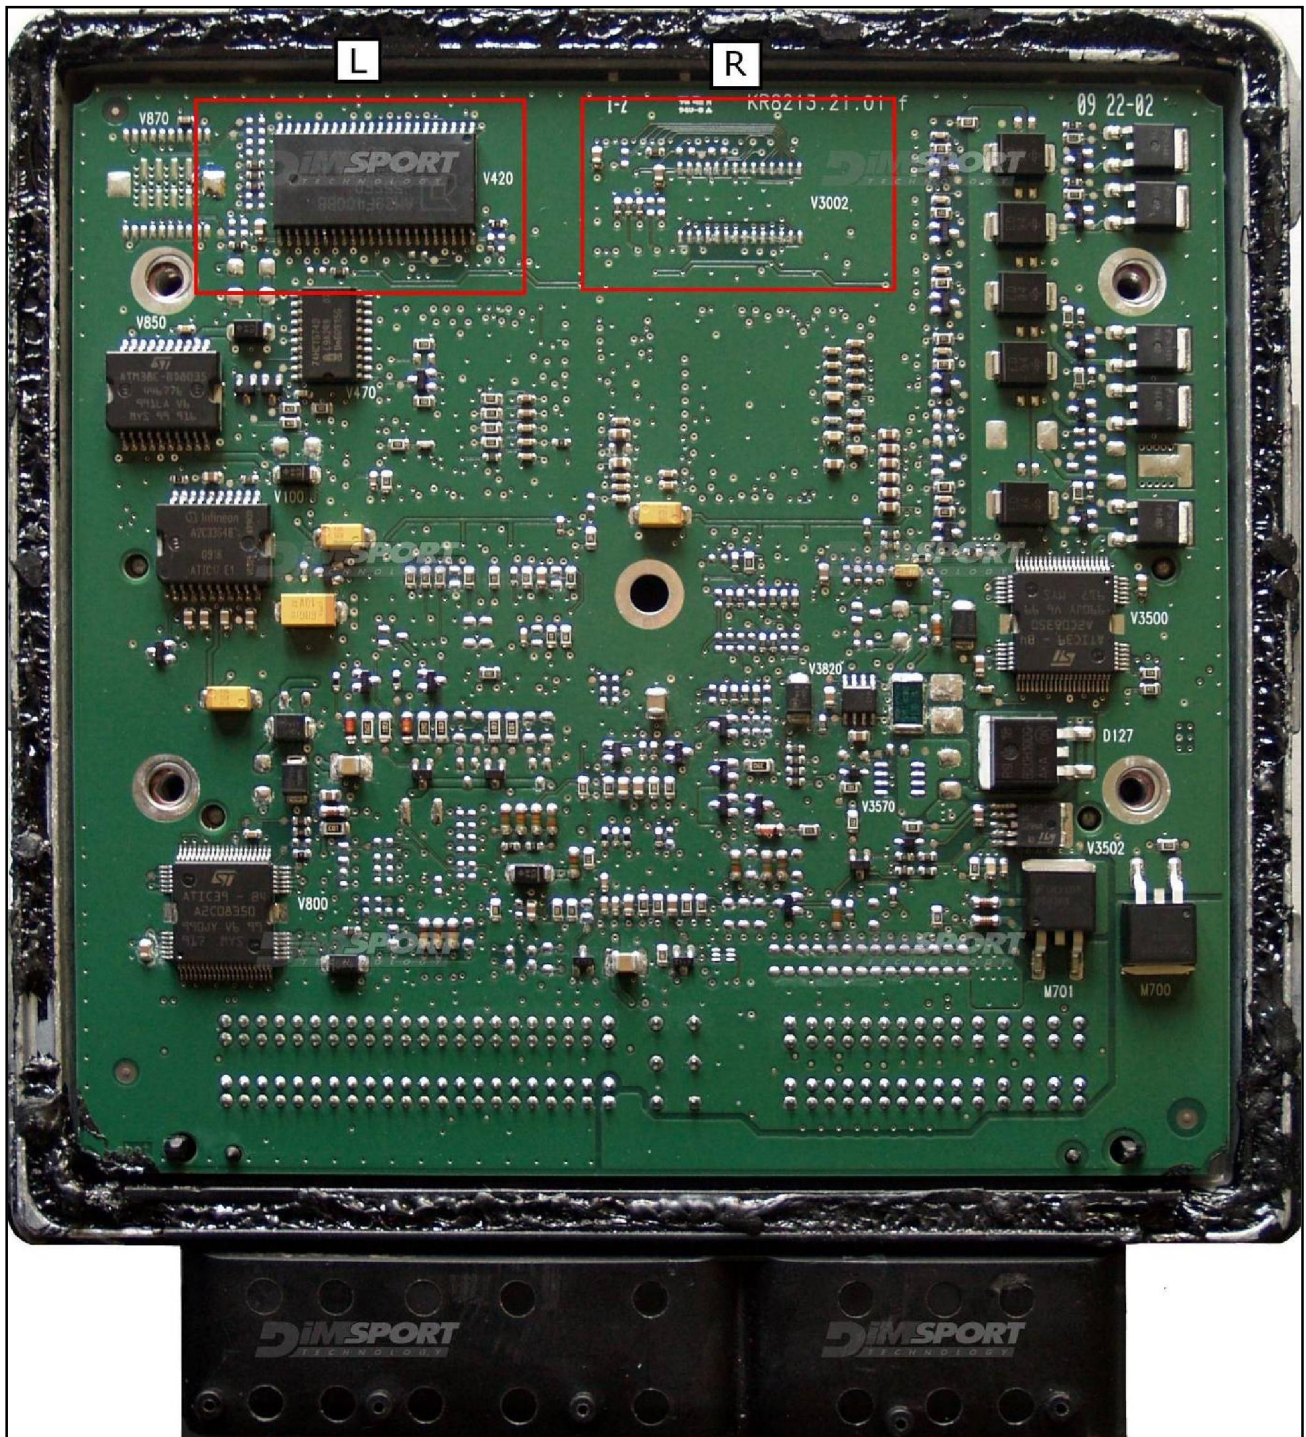


DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C.
 Make sure that the POWER led (red) on NEW TRASDATA is ON.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
ROSSO RED	POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK	MASSA GND
GIALLO YELLOW	KLINE
VERDE GREEN	CAN LOW
BIANCO WHITE	CAN HIGH
GRIGIO GREY	POL4 BOOT
BLU BLUE	POL5 CNF1
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
MARRONE BROWN	RESET

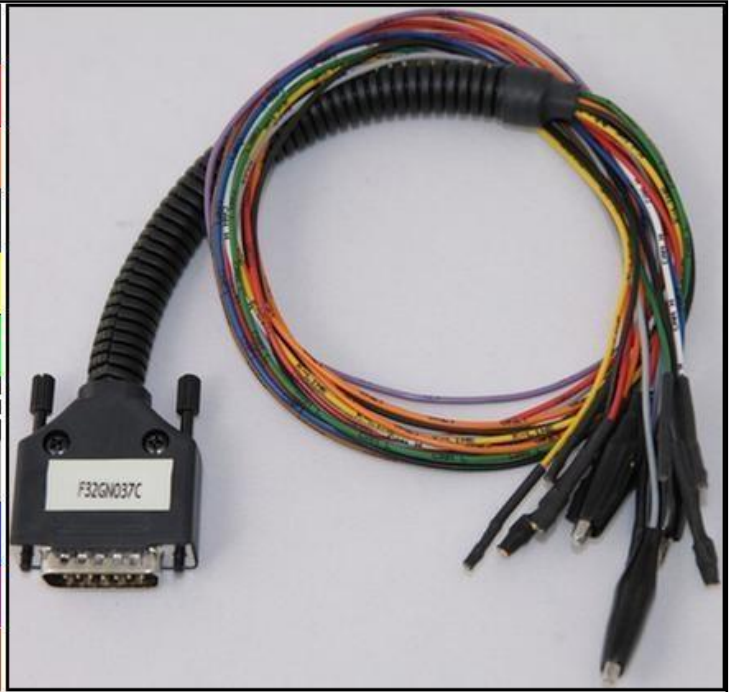


LEFT FLASH "L" ECU CONNECTOR

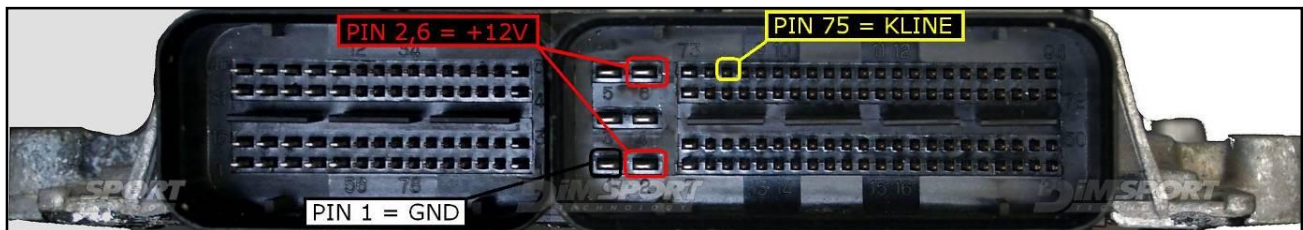


POL4 CONNECTION

Connect the GREY wire of the cable F32GN037C as described here below :

COLORE FILO WIRE COULOR	DESCRIZIONE DESCRIPTION
GRIGIO	POL4
GREY	BOOT

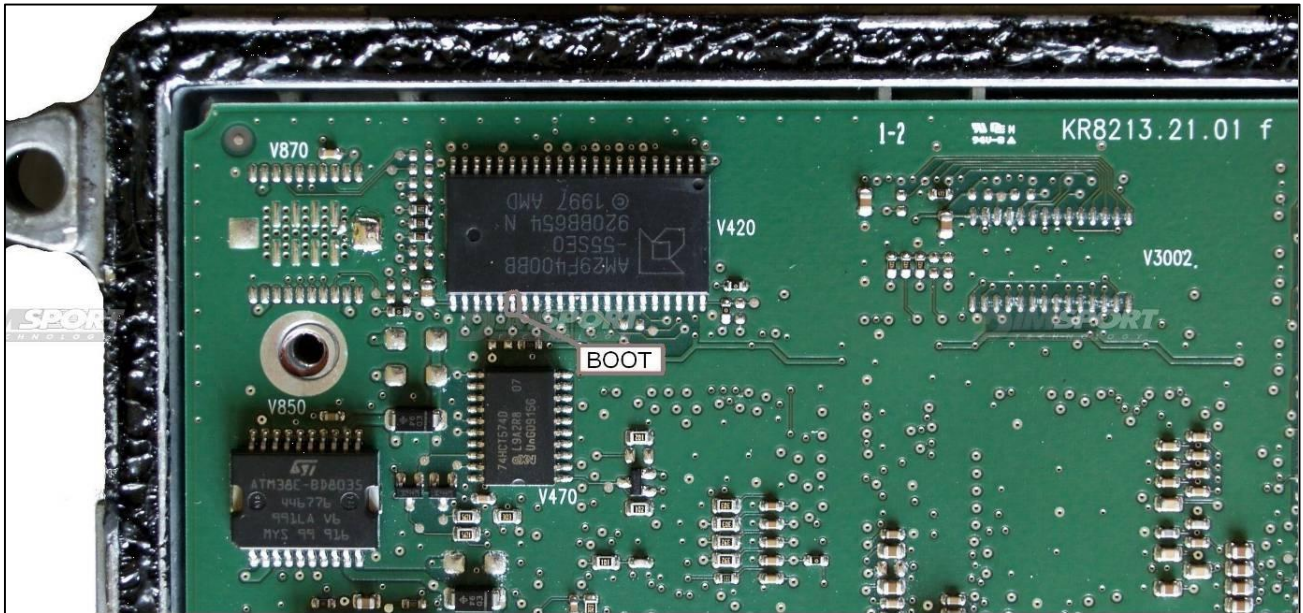

RIGHT FLASH "R" ECU CONNECTOR

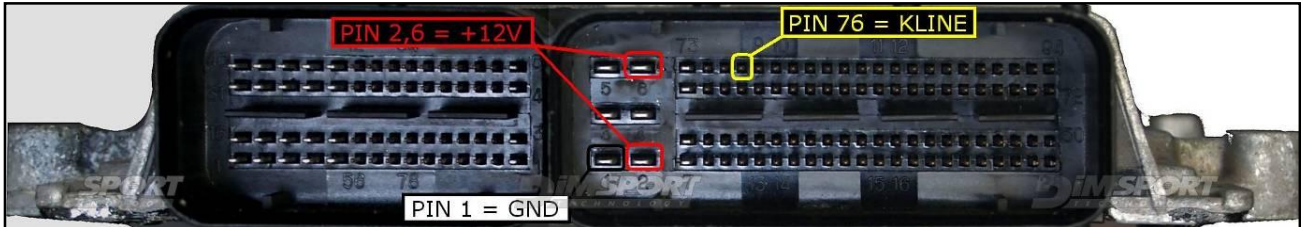

POL4 CONNECTION

Connect the GREY wire of the cable F32GN037C as described here below :

COLORE FILO WIRE COULOR	DESCRIZIONE DESCRIPTION
GRIGIO GREY	POL4 BOOT

