
plugin 250 - SAGEM3000 SH7055 RE-


NAULT plugin 559 - SAGEM3000 SH7055 YALE

The lay-by pins are placed in the lower part of the ECU. Micro ${\sf SH7055}$

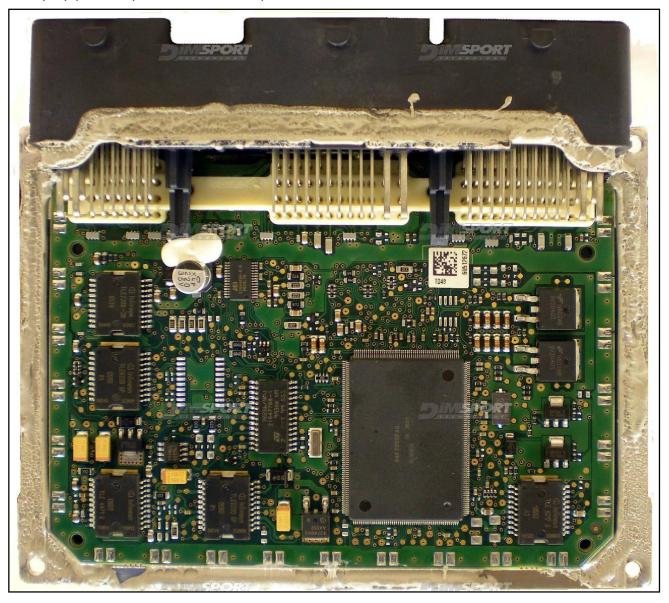


DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C. Make sure that the POWER led (red) on Trasdata is ON.

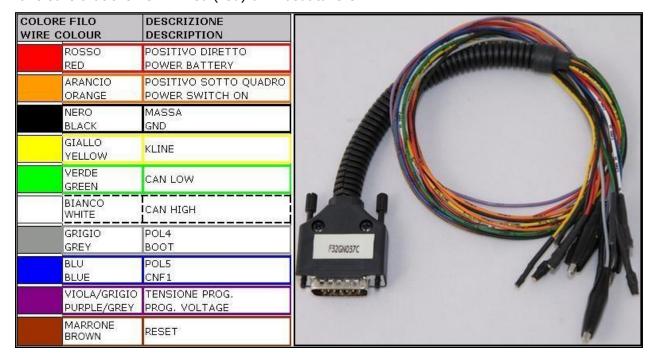

ECU CONNECTOR

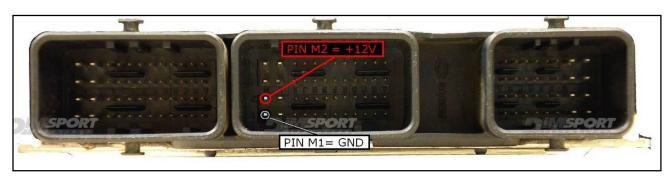


WARNING:

on this ECU you must use two different flat cables: one is for the READING procedure and one is for the WRITING procedure.

DIRECT CONNECTION – ECU READING:


For the READING procedure use the FLAT cable F34NTF53

	11 25 12 26	
Pin	Colore Colour	
11	Non usato	
U/Au	Not used Non usato	
12	Not used	
13	Non usato	
+3	Not used	
14	Non usato Not used	
4.5	Non usato	
15	Not used	
16	Non usato Not used	
2.0	Non usato	
17	Not used	
18	Grigio	
5000000	Grey	
19	Bianco White	
2.0	Nero	
20	Black	
21	Marrone Brown	
2.2	Rosso	
	Red Arancio	
23	Orange Giallo	
24		
800-500	Yellow Verde	
25	Green	
26	Non usato	
26	Not used	

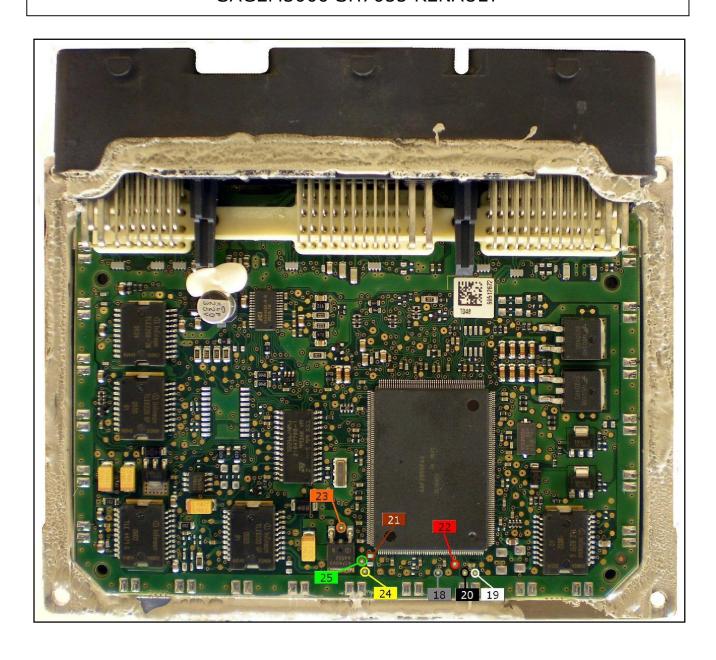

DIRECT CONNECTION - ECU WRITING:

For the WRITING procedure use the FLAT cable F34NTF51

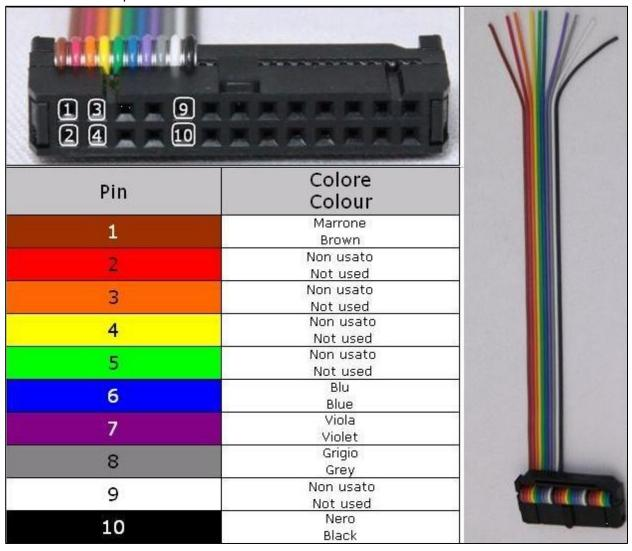

WARNING: to perform the writing it is necessary to make a short-circuit (LINK). Such bridge is used for the WRITING ONLY, remove it after the writing procedure.

